



It's what's in the cup that matters.

A PARTNER YOU CAN COUNT ON

BUNN[®]

April 2010

E9000 0000E

Table of Contents

Single Serve Brewers	1
Satellite Coffee Brewers	3
Thermal Coffee Brewers	13
Automatic Decanter Brewers and Urns	21
Pourover Brewers	29
Coffee Grinders	33
Espresso Systems	37
Iced Tea and Coffee Brewers	39
Liquid Coffee High Volume Systems	45
Hot Beverage Systems	49
Cold Beverage Systems	53
Frozen Beverage Systems	57
Precise Temperature Water Dispensers	59
Related Products	
Water Quality Filter Systems	60
Decanters and Warmers	61
Paper Filters	62
Universal Airpot Racks and Coffee-isers	63
BUNNserve®	64

 *International models available*

AGENCY SYMBOLS



UL Listed



**Electrical Testing
Labs Sanitation**



**UL Classified
Environmental &
Public Health**



NSF International



**Electrical Testing
Labs Canada**



**Electrical Testing
Labs Safety**



Canadian Safety

AutoPOD, AXIOM, BrewLOGIC, BrewMETER, Brew Better Not Bitter, BrewWISE, BrewWIZARD, BUNN Espresso, BUNN Pour-O-Matic, BUNN, BUNNlink, Bunn-O-Matic, Bunn-O-Matic, BUNNserve, Cool Froth, DBC, Dr. Brew, Dual, Easy Pour, EasyClear, EasyGard, FlavorGard, Gourmet Ice, Gourmet Juice, High Intensity, iMIX, Infusion Series, Intellisteam, My Café, PowerLogic, Quality Beverage Equipment Worldwide, Safety-Fresh, Scale-Pro, Silver Series, Single, Smart Funnel, Smart Hopper, SmartWAVE, Soft Heat, SplashGard, The Mark of Quality in Beverage Equipment Worldwide, ThermoFresh, 392, A Partner You Can Count On, Air Brew, Air Infusion, Beverage Bar Creator, Beverage Profit Calculator, BUNNSource, Coffee At Its Best, Digital Brewer Control, Pouring Profits, Respect Earth, Seed to Cup Café, Signature Series, Tea At Its Best, Phase Brew, Titan, trifecta, Ultra, Velocity Brew are either trademarks or registered trademarks of Bunn-O-Matic Corporation.

AutoPOD® Pod Brewer

Commercial-grade, single-cup system with the convenience of automatic pod disposal

Single Serve



AutoPOD Pod Brewer



Rack Assembly



Brew Station and 1 Rack Assembly

Versatile, colorful merchandising system for small coffee brewers, pods, and condiments.

PRODUCT FEATURES

- Eliminates waste by brewing one fresh cup at a time from a wide variety of coffee and tea pods.
- Automatically disposes of spent pods after each brew.
- Removable pod bin holds up to 25 pods.
- Pod bin and drip tray can be modified for under-counter disposal of pods.
- Works with most coffee and tea pods.
- Patented sprayhead design allows for proper extraction of all flavoring materials and aromatics.
- Brews up to 16 ounces of coffee or tea in less than a minute.
- Digital display in English/Spanish for easy programming, operation and control.
- Control extraction utilizing pulse brew technology with BrewMETER®.
- Push and hold hot water button provides up to 10 ounces of hot water for cappuccino, cocoa and soups.
- Integrated cup booster allows for 5" or 8" cup clearance.
- Energy-saver mode reduces tank temperature during idle periods. Recipe labels provided allow for customization of beverages dispensed.
- Ready to use out of the box.

 International electrical configurations

AutoPOD Pod Brewer									
Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
AutoPOD	40300.0000	15.8" H x 9.7" W x 15.2" D (40.1cm H x 24.6cm W x 38.6cm D)	29.5 lbs. (13.4 kg.)	120	12.1	1450	60-8 oz. cups/hr 60-(237 mL)	Yes	 
AutoPOD (pump model)	40300.0001		30 lbs. (13.6 kg.)						
Brew Station (with Standard Header)	39501.0001	20" H x 26.2" W x 16" D (50.8cm H x 66.5cm W x 40.6cm D) <i>height dimension with graphic header</i>	26 lbs. (11.8 kg)						
Rack Assembly	39502.0001	16" H x 9.5" W x 16" D (40.6cm H x 24.1cm W x 40.6cm D)	8 lbs (3.6 kg)						

My Café® Automatic and Pourover Brewers



**My Café
Automatic**

**My Café
Pourover**

PRODUCT FEATURES

- Patented pod drawer works with most tea and coffee pods, from 45 to 61 mm.
- Fast brew coffee in about 30 seconds; brew tea in less than one minute.
- Patented sprayhead allows extraction of all coffee flavoring materials and aromatics.
- Tea button features pulse brew technology to provide steeping action.
- Brew 4 to 12 ounces (118 - 355 mL) of coffee or tea to preferred strength by adjusting the portion/volume control.
- Easy to use and maintain with a removable water reservoir, a drawer-style pod holder and dishwasher safe components.
- Energy-saver mode reduces tank temperature during idle periods.
- Automatic model is connected to waterline, eliminating manual reservoir refills.
- Includes two pod holders.



International electrical configurations

My Café Automatic and Pourover Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
MCP (Pourover)	35400.0003	12.5" H x 8" W x 10.5" D (31.7cm H x 20.3cm W x 26.7cm D)	9.75 lbs. (4.4 kg.)	120	12	1440	60-8 oz. cups/hr 60-(237 mL)	Yes	 
	35400.0004 (high altitude)								
MCA (Automatic)	35400.0009	13.6" H x 8" W x 10.5" D (34.5cm H x 20.3cm W x 26.7cm D)	11.35 lbs. (5.1 kg.)	120	12	1440	60-8 oz. cups/hr 60-(237 mL)	Yes	 
	35400.0010 (high altitude)								

Titan™ Dual and Single Coffee Brewers

High-volume brewing solution featuring simple operation, precise extraction control and portable servers



Titan Dual Brewer
(server sold separately)



Titan Single Brewer
(server sold separately)



Titan TF Server

PRODUCT FEATURES

- Dual brews 34.3 gallons (129.8 litres) of perfect coffee per hour.
- Single brews 22.5 gallons (85.2 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; variable by-pass controls coffee strength.
- BrewMETER® allows automatic programming of pulse routine.
- SplashGard® funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 litre) capacity and paper filter retainers to eliminate fold-over.
- ThermoFresh® servers are insulated to keep coffee hot for hours.
- Left or right faucet for hot water.
- Energy saver mode reduces tank temperature during idle periods.
- Use BUNN paper filter – Product No. 20111.0000.

TITAN TF SERVER

- Insulated server keeps coffee hot for hours.
- Contemporary styling and wrap program for maximum merchandising.
- Large cup clearance allows for dispensing into cups, decanters and thermal carafes.
- Brew-through lid.
- Integrated sight gauge assembly allows for easy cleaning.
- Designed for use with Titan brewers.

Titan 3 Gallon Coffee Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
Titan Dual	39200.0000	40"H x 35.6"W x 21.7"D (101.7cm H x 90.5cm W x 55.2cm D)	148 lbs. (67.1 kg)	120/208 (3 phase)	33.4	12000	34.3 gal./hr. 129.8 L/hr.	No	
				120/208 (1 phase)	40.1	8200	22.9 gal./hr. 86.7 L/hr.		
Titan Single	39300.0000	40.02" H x 21.3" W x 21.74" D (101.7cm H x 54.1cm W x 55.2cm D)	107 lbs. (48.5 kg)	120/208 (3 phase)	33.4	12000	22.5 gal./hr. 85.2 L/hr.		
				120/208 (1 phase)	40.1	8200	17 gal./hr. 64.4 L/hr.		
Titan TF Server	39400.0001	23.7"H x 13.7"W x 17.1"D (60.2cm H x 34.8cm W x 43.4cm D)	17.5 lbs. (7.9 kg)	n/a	n/a	n/a			

BrewWISE® ThermoFresh® Brewers



BrewWISE Dual TF
(server sold separately)



BrewWISE Single TF
(server sold separately)



BrewWISE Recipe Writer
(requires recipe cards - sold separately)

The Single and Dual TF brewers use vacuum-insulated ThermoFresh servers.

PRODUCT FEATURES

- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 litre) batches.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavor extraction.
- Variable by-pass controls coffee strength.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®.
- Simplify installation and calibration by creating coffee recipe cards and dedicated funnels with the Recipe Writer using your PC (U.S. and English MS Windows® compatible).
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.
- Compatible with BUNNlink®.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

BrewWISE Single and Dual ThermoFresh DBC Brewers

Model	Product #	Size		Finish	Electrical			Brewing Capacity	Funnel Locks	Cord Attached	Agencies		
		Dimension	Weight		Volts	Amps	Watts						
Single TF DBC	34800.0000	35.7" H x 12.1" W x 19.2" D (90.7cm H x 30.7cm W x 48.8cm D)	59 lbs. (26.8 kg)	Stainless	120/240	16.6	4000	11.4 gal./hr. 43.2 L/hr.	Yes	No	 		
	34800.0002				120/208	19.2			No				
	34800.0003				120/208	19.2			Yes				
	34800.0004			35.7" H x 12.1" W x 19.2" D (90.7cm H x 30.7cm W x 48.8cm D)	59 lbs. (26.8 kg)	Black	120/240	16.6	4000			11.4 gal./hr. 43.2 L/hr.	No
	34800.0001						120	18.1					2200
	34800.0008					Stainless	120	18.1	2200			6.5 gal./hr. 24.6 L/hr.	Yes
	34800.0017						120	18.1	2200			6.5 gal./hr. 24.6 L/hr.	Yes
Dual TF DBC	34600.0000	35.7" H x 21.8" W x 20.2" D (91.7cm H x 55.4cm W x 51.3cm D)	92.5 lbs. (42 kg)	Stainless	120/240	27.5	6600	18.9 gal/hr 71.5 L/hr.	No	No	 		
	34600.0001			Black									
	34600.0002			Stainless									
	34600.0003			Black	120/208	27.4	5700	16.3 gal/hr 61.7 L/hr.	No				
	34600.0004			Stainless									
	34600.0005			Black									
	34600.0006			Stainless	120/208	27.4	5700	16.3 gal/hr 61.7 L/hr.	Yes				
	34600.0007			Black	120/208	27.4	5700	16.3 gal/hr 61.7 L/hr.					
Recipe Writer	34444.0000	2.2" H x 6.4" W x 9.5" D (5.6cm H x 16.2cm W x 21.4cm D)	6.1 lbs. (2.8 kg)	Black	120	1	n/a	n/a	n/a	n/a			
Recipe Card	34447.0000	n/a	1.2 lbs.	n/a									
Ad Card	34448.0000	n/a	1.2 lbs.	n/a									

Digital ThermoFresh® Servers and Stand



COMMON FEATURES

- Vacuum insulated.
- Digital sight gauge creates more room for merchandising wrap.
- Four-hour digital indicator display in 15-minute segments.
- Volume indicator display.
- Digital sight gauge operates on four AAA batteries with an average 1-year lifespan. Display shows low battery symbol.
- Fast flow faucet.
- Brew-through lid.

TF SERVER WITH BASE

- Built-in drip tray easily removed for cleaning.
- 7.7" (19.6 cm) cup clearance.
- Stackable design for dry storage.

DIGITAL TF SERVER WITH COUNTDOWN TIMER

- Four-hour digital indicator displays in 1-minute increments.

TF BASELESS SERVER

- 7.05" (17.9 cm) cup clearance.
- Use with the TF Server Stand for easy dispensing. Product No. 39795.0000

1 Gal TF Server

Digital ThermoFresh Servers										
Model	Product #	Size		Electrical			Finish	Holding Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
TF Server	39500.0050	21.1" H x 9.3" W x 13.1" D (53.6cm H x 23.6cm W x 33.3cm D)	13 lbs (5.9 kg)	n/a	n/a	n/a	SST	1 gal (3.8 litre)	No	NSF
	Black									
	39550.0050	23.1" H x 9.3" W x 13.1" D (58.7cm H x 23.6cm W x 33.3cm D)	14 lbs. (6.4 kg)				SST	1.5 gal (5.7 litre)		
	Black									
DSG TF Server (countdown timer)	39500.0100	21.1" H x 9.3" W x 13.1" D (53.6cm H x 23.6cm W x 33.3cm D)	13 lbs (5.9 kg)	n/a	n/a	n/a	SST	1 gal (3.8 litre)	No	NSF
	39550.0100	23.1" H x 9.3" W x 13.1" D (58.7cm H x 23.6cm W x 33.3cm D)	14 lbs. (6.4 kg)				SST	1.5 gal (5.7 litre)		
Digital ThermoFresh Servers (baseless) and Stand										
TF Server	39500.0054	13.1" H x 9.1" W x 13.1" D (33.3cm H x 23.11cm W x 33.3cm D)	13 lbs (5.9 kg)	n/a	n/a	n/a	SST	1 gal (3.8 litre)	No	NSF
	Black									
	39550.0054	15.1" H x 9.1" W x 13.1" D (38.35cm H x 23.11cm W x 33.3cm D)	14 lbs (6.4 kg)				SST	1.5 gal (5.7 litre)		
	Black									
TF Server Stand	39795.0000	8.7" H x 9.4" W x 12.9" D (22.1cm H x 23.9cm W x 32.8cm D)	4.2 lbs (1.9 kg)				Black	n/a		n/a

ThermoFresh® Servers and Stand



Baseless 1 Gal TF Server



TF Server Stand



1.5 Gal TF Server

COMMON FEATURES

- Vacuum insulated.
- Easily transport coffee to remote locations.
- Fast flow faucet.
- Brew-through lid.

TF SERVER WITH BASE

- Built-in drip tray attached to the server for transportation – easily removed for cleaning.
- 7.7" (19.6 cm) cup clearance.

TF BASELESS SERVER

- 7.05" (17.9 cm) cup clearance.
- Use with the TF Server Stand for easy dispensing. Product No. 39795.0000

TF Servers	For Use With	Page #
with base - digital or mechanical gauge	Single TF DBC	4
	Dual TF DBC	
	ICB Tall	14
	ICB Twin Tall	
baseless - digital or mechanical gauge with adapter ring, sold separately	Single SH DBC	9
	Dual SH DBC	
	Single SH	8
	Dual SH	
baseless - digital or mechanical gauge	ICB	13
	ICB-Twin	

ThermoFresh Servers

Model	Product #	Size		Electrical			Finish	Holding Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
TF Server	39500.0000	20.8" H x 9.3" W x 13.2" (52.8cm H x 23.6cm W x 33.5cm D)	13 lbs. (5.9 kg)	n/a	n/a	n/a	SST	1 Gallon (3.8 L)	No	NSF
	39500.0001						Black			
	39550.0000	22.9" H x 9.3" W x 13.2" D (58.2cm H x 23.6cm W x 33.5cm D)	14 lbs. (6.4 kg)				SST	1.5 Gallon (5.7 L)		
	39550.0001						Black			

ThermoFresh Servers (baseless) and Stand

Model	Product #	Size		Electrical			Finish	Holding Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
TF Server	39500.0004	12.8" H x 9.1" W x 13.1" D (32.5cm H x 23.11cm W x 33.3cm D)	10 lbs. (4.5 kg)	n/a	n/a	n/a	SST	1 Gallon (3.8 L)	No	NSF
	39500.0005						Black			
	39550.0004	14.9" H x 9.1" W x 13.2" D (37.8cm H x 23.11cm W x 35.1cm D)	11 lbs. (5.0 kg)				SST	1.5 Gallon (5.7 L)		
	39550.0005						Black			
TF Server Stand	39795.0000	8.7" H x 9.4" W x 12.9" D (22.1cm H x 23.9cm W x 32.8cm D)	4.2 lbs (1.9 kg)				Black	n/a		n/a

BrewWISE® Soft Heat® DBC® Brewers



BrewWISE Dual SH DBC
(server sold separately)



BrewWISE Single SH DBC
(server sold separately)

PRODUCT FEATURES

- Brews ½, 1, or 1 ½ (1.9, 3.8 or 5.7 litre) gallon batches.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavor extraction.
- Variable by-pass controls coffee strength.
- Dual holds two 1½ gallon (5.7 litre) SH servers. Single holds one server.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGuard®.
- Simplify installation and calibration by creating coffee recipe cards and dedicated funnels with the Recipe Writer using your PC (U.S. and English MS Windows® compatible).
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.
- Compatible with BUNNlink®.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

BrewWISE Single and Dual Soft Heat DBC Brewers											
Model	Product #	Size		Finish	Electrical			Faucet Location	Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts				
Single SH DBC	33600.0000	35.8"H x 9.3"W x 23.1"D (90.9cm H x 23.6cm W x 58.7cm D)	59 lbs. (26.8 kg)	Stainless	120/240	17.5	4100	Upper	11.4 gal/hr 43.2 L/hr.	No	 
	Black										
	33600.0013										
Dual SH DBC	33500.0000	35.8"H x 18"W x 21.2"D (90.9cm H x 45.7cm W x 53.8cm D)	90 lbs. (40.8 kg)	Stainless	120/240	29.1	6800	Upper	18.9 gal/hr 71.5 L/hr.	No	 
	Black										
	33500.0004										
	33500.0006		90 lbs. (40.8 kg)	Stainless				Lower			

Soft Heat® Brewers



Dual SH
(server sold separately)



Single SH
(server sold separately)

PRODUCT FEATURES

- Variable batch selector knob allows ½, 1 or 1½ gallon (1.9, 3.8 or 5.7 litre) batches.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- Dual holds two 1½ gallon (5.7 litre) SH servers. Single holds one server.
- Patented Soft Heat® server heat control automatically shuts off once target temperature is reached. Can be set to 175°-190°F (79.4° - 87.8°C).
- Remote 1 or 2 server docking stations (sold separately).
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

Single and Dual Soft Heat Brewers

Model	Product #	Size		Finish	Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
Single SH	27800.0001	35.8"H x 9.3"W x 20.2"D (90.9cm H x 23.6cm W x 50.8cm D)	61 lbs. (27.7 kg)	Stainless	120/208	18.3	3800	10.6 gal/hr 40.1 L/hr.	No	 
	27800.0002		59 lbs. (26.8 kg)		120/240	17.9	4300	11.4 gal/hr 43.2 L/hr.		
	27800.0009		57 lbs. (25.9 kg)		120	17.5	2100	5.1 gal/hr 19.3 L/hr.		
Dual SH	27900.0001	35.8"H x 18"W x 20.5"D (91cm H x 45.7cm W x 52.1cm D)	90 lbs. (40.9 kg)	Stainless	120/208	28.3	5900	16.3 gal/hr 61.7 L/hr.	No	 
	27900.0002		89 lbs. (40.4 kg)		120/240		6800	18.9 gal/hr 71.5 L/hr.		
	27900.0020		90 lbs. (40.9 kg)	Black	120/208	5900				

Soft Heat® Servers and Stands



1 SH Server and Docking Station



2SH Docking Station

SOFT HEAT® SERVER FEATURES

- Soft Heat® servers supply controlled heat to coffee.
- LED power indicator.
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.

 International electrical configurations

SOFT HEAT DOCKING STATION FEATURES

- Remote one and two server docking stations.
- Instant power contact with servers.

 International electrical configurations

	For Use With	Page #
Soft Heat Server	Single SH DBC	7
	Dual SH DBC	
	Single SH	8
	Dual SH	

Soft Heat Servers and Docking Stations												
Model	Product #	Size		Finish	Electrical			Capacity	Setting	Legs	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts					
1SH Stand	27825.0000	28.2"H x 10"W x 14"D (71.6cm H x 25.4cm W x 35.6cm D)	13 lbs. (5.9 kg)	Stainless	120	0.75	90	1 SH Server	N/A	4"	Yes	 
	27825.0004		6"									
	27825.0003		Black									
2SH Stand	27875.0000	11.6"H x 18.7"W x 13.2"D (29.5cm H x 47.5cm W x 33.5cm D)	22 lbs. (10 kg)	Stainless	1.5	180	2 SH Servers	N/A	4"	Yes	 	
	27875.0003		Black									
SH Server	27850.0001	16.6"H x 8.5"W x 14" D (42.2cm H x 21.6cm W x 35.6cm D)	17 lbs. (7.8 kg)	Stainless	n/a	n/a	n/a	1 1/2 Gal	n/a	n/a	Yes	 
	27850.0004		18 lbs. (8.2 kg)	Black				30 Min.				
	27850.0006		17 lbs. (7.8 kg)	Stainless				45 Min.				
	27850.0008			Black				60 Min.				
	27850.0016			Stainless				240 Min.				
	27850.0022			Black				120 Min.				

Single® and Dual® Brewers



Dual



Single

PRODUCT FEATURES

- Brews ½, 1 or 1½ gallon (1.9, 3.8 and 5.7 litre) batches.
- Adjustable bypass ensures perfect coffee regardless of batch size.
- Electronic timer ensures fast set up and accurate brew levels.
- Electronic grinder interface instructs G9T HD grinder on exact amount of coffee for selected brew batch size.
- 1.5 GPR portable server (included) has a patented Safety-Fresh® brew-through lid with vapor seal and spill protection.
- SplashGard® funnel deflects hot liquids away from the hand.
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

Single and Dual Brewers with Portable Servers

Model	Product #	Size		Finish	Electrical			Brewing Capacity	Batch Settings	Funnel Type	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts					
Single	23050.0006	29.3"H x 9.25"W x 19"D (74.4cm H x 54.9cm W x 48.3cm D)	57 lbs. (25.9 kg)	Stainless	120	17.5	2100	5.1 gal/hr 19.3 L/hr.	One	Plastic	No	
	23050.0007		58 lbs. (26.3 kg)				2100					
	23050.0010		59 lbs. (26.8 kg)		120/208	18.3	3800	10.6 gal/hr 40.1 L/hr.	Three	Stainless		
	23050.0011				120/240	17.9	4300	11.4 gal/hr 43.2 L/hr.				
Dual	20900.0008	29.3"H x 18"W x 19.3"D (74.4cm H x 45.7cm W x 49cm D)	92 lbs. (41.8 kg)	Stainless	120/208	28.8	5990	16.3 gal/hr 67.7 L/hr.	One	Plastic	No	
	20900.0010		94 lbs. (42.7 kg)									
	20900.0011		95 lbs. (43.1 kg)		120/240	28.7	6890	18.9 gal/hr 71.5 L/hr.	Three	Stainless		

1 Gallon Automatic Brewer



Single CWTF

SINGLE CWTF FEATURES

- Brew half gallon and 1 gallon (1.9 and 3.8 litre) batches into included 1.5 GPR portable server.
- Gourmet funnel models allows use of heavier throw weights of coffee.
- 1.5 GPR portable server (included) has a patented Safety-Fresh® brew-through lid with vapor seal and spill protection.
- SplashGard® funnel deflects hot liquids away from the hand.
- All stainless steel construction.
- Half gallon (1.9 litre) pourover backup.
- Gourmet funnel requires BUNN paper filter 20100.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

1 Gallon Automatic Coffee Brewer											
Model	Product #	Size		Finish	Electrical			Funnel Type	Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts				
Single CWTF15	35000.0004	26.1"H x 8.5"W x 18.9"D (66.3cm H x 21.6cm W x 48cm D)	46.5 lbs. (21 kg)	Stainless	120	13.8	1650	Gourmet Stainless	3.8 gal/hr 14.4 L/hr.	Yes	UL LISTED
Single CWTF35	35000.0006				120/208-240	15.8	3650		7.5/9.0 gal/hr 28.4/34.1 L/hr.	No	NSF

Portable Servers and Warmers



1.5 GPR
Portable Server



RWS1
Warmer

PORTABLE SERVER FEATURES

- 1 or 1½ gallon (3.8, 5.7 litre) capacities.
- Easily transport portable servers for remote service.
- Patented Safety-Fresh® brew-through lid with vapor seal and spill protection GPR servers.

WARMER FEATURES

- Accepts 1 or 1½ gallon (3.8, 5.7 litre) servers.
- Available with plastic, satin nickel or stainless steel legs.
- Legs are adjustable on RWS1

 International electrical configurations

GPR Server	For Use With	Page #
	Single	10
	Dual	
	Single CWTF	11
Single CDF		

Portable Servers and Warmers

Model	Product #	Size		Finishes	Electrical			Capacity	Cord Attached	Agencies	
		Dimension	Weight		Volts	Amps	Watts				
1GPR (bail handle)	12487.0001	14"H x 8.5"W x 12.7"D (35.6cm H x 21.6cm W x 32.2cm D)	8.5 lbs. (3.9 kg)	Stainless	n/a	n/a	n/a	1 gal 3.8 L	n/a		
1GPR (side handle)	12487.0003		9 lbs. (4.1 kg)								
1GPR-FF (bail handle, fast flow faucet)	12487.0005		10 lbs. (4.5 kg)								
1.5GPR-FF (top handle, fast flow faucet)	20950.0004	18.1"H x 8.5"W x 12.7"D (46cm H x 21.6cm W x 32.2cm D)	10 lbs. (4.5 kg)		120	0.8	100	1 1/2 gal 5.7 L	Yes		 
RWS1 (plastic legs)	12203.0010	7 lbs. (3.2 kg)									
RWS1 (satin nickel legs)	12203.0014	7.5" H x 8.25" W x 9.3" D (19.1cm H x 21cm W x 23.6cm D)	9 lbs. (4.1kg)								

Infusion Coffee Brewers



ICB-DV
(Airpot sold separately)



ICB-Twin
(TF Server sold separately)

COMMON FEATURES

- Three brew buttons allow for 3 separate brewing profiles. Two programmable batch switches for full and half batches.
- Brews into 2.5 to 3.8 litre airpots and 1 and 1.5 gallon (3.8 and 5.7 L) baseless ThermoFresh® servers.
- Large sprayhead and BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction. DBC grinder communicates with brewer through Smart Funnel®.
- Energy-saver mode reduces tank temperature during idle periods.
- Alphanumeric display communicates in English and Spanish. Display capable of showing English or metric measurements.
- Compatible with BUNNlink®.

ICB-DV FEATURES

- Brews 5.1 to 11.9 gallons (19.3 to 45 litres) of perfect coffee per hour.
- Large 3-gallon (11.36 litre) tank provides back-to-back brewing capacity at 208-240V applications.
- Dual voltage adaptable. Can operate at 120V/15amp or 208-240V/20amp.
- Includes overlay kits for customization of brewer interface.

ICB-TWIN FEATURES

- Brews up to 18.9 gallons (71.5 litres) of perfect coffee per hour.
- Large 5.6 gallon (21.2 litre) tank provides back-to-back brewing capacity

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

Infusion Coffee Brewers										
Model	Product #	Size		Funnel Type	Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
ICB-DV	36600.0000	26.01"H x 10.19" W x 22.42" D (66.1cm H x 25.9cm W x 57cm D)	47.5 lbs. (21.5 kg)	Smart Funnel	120	14	1700	5.1 gal. (19.3 L)	Yes	 
					120/208	13.8	2900	8.9 gal. (33.7 L)		
					120/240	16.8	4050	11.9 gal. (45 L)		
ICB Twin	37600.0000	26.2"H x 20.0"W x 22.4"D (66.5cm H x 50.8cm W x 56.9cm D)	77 lbs. (34.9 kg)		120/240	25	6000	18.9 gal/hr (71.5 L/hr)		
	37600.0002				120/208	28				

Infusion Coffee Brewers Tall



ICB-DV Tall
(TF Server sold separately)



ICB-Twin Tall
(TF Server sold separately)

COMMON FEATURES

- Designed to brew into 1 gallon and 1.5 gallon (3.8 and 5.7 litre) ThermoFresh® servers with base for easy transport of coffee to other locations.
- Easy Pulse interface allows automatic programming of pulse routine.
- BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction. DBC grinder communicates with brewer through Smart Funnel®.
- Energy-saver mode reduces tank temperature during idle periods.
- Digital display in English/Spanish for easier programming and control. Advertising messages and machine status also displayed. Display capable of showing English or Metric measurements.
- Compatible with BUNNlink™.

ICB-DV TALL FEATURES

- Brews 5.1 to 11.9 gallons (19.3 to 45 litres) of perfect coffee per hour.
- Large 3-gallon (11.36 litre) tank provides back-to-back brewing capacity at 208-240V applications.
- Dual voltage adaptable. Can operate at 120V/15amp or 208-240V/20amp.
- Includes overlay kits for customization of brewer interface.

ICB-TWIN TALL FEATURES

- Brews up to 18.9 gallons (71.5 litres) of perfect coffee per hour.
- Large 5.6 gallon (21.2 litre) tank provides back-to-back brewing capacity

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Infusion Coffee Brewers Tall

Model	Product #	Size		Funnel Type	Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
ICB-DV Tall	36600.0005	34.4"H x 10.1"W x 19.9"D (87.4cm H x 25.7cm W x 50.5cm D)	51 lbs. (23.1 kg)	Smart Funnel	120	14	1700	5.1 gal. (19.3 L)	Yes	 
					120/208	13.8	2900	8.9 gal. (33.7 L)		
					120/240	16.8	4050	11.9 gal. (45 L)		
ICB Twin Tall	37600.0005	34.4"H x 22.6"W x 20.1"D (87.4cm H x 57.4cm W x 51.1cm D)	85.5 lbs. (38.8 kg)		25	6000	18.9 gal/hr (71.5 L/hr)			

AXIOM[®] Airpot Brewers

Medium volume brewing solution featuring simple operation, precise extraction control and a variety of portable servers



AXIOM Twin APS
(airpots sold separately)



AXIOM-DV-APS
(airpot sold separately)

COMMON FEATURES

- BrewWIZARD[®] technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Brews directly into 1.9 to 3 liter airpots.
- Convenient airpots keep coffee hot and for hours.
- Ensures coffee brew quality with cold brew lock out capability.
- Electronic diagnostics and built in tank drain for ease of service.
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature control.
- Hot water faucet.
- SplashGard[®] funnel deflects hot liquids away from the hand.
- Energy-saver mode reduces tank temperature during idle periods.

AXIOM-DV-APS FEATURES

- Easily convertible by flipping a switch to:
 - 120 volt, 12.5 amp
 - 120/208 volt, 13 amp
 - 120/240 volt, 15 amp
- Brews 4.2 to 7.5 gallons (15.7 to 28.4 litres) of perfect coffee per hour.

AXIOM-TWIN-APS FEATURES

- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Twin brew head system.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations
(Single airpot brewer models only)

AXIOM Coffee Brewers										
Model	Product #	Size		Funnel Type	Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
AXIOM-DV-APS	38700.0010	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	36 lbs. (16.3 kg)	Plastic Funnel	120	12.5	1500	4.2 gal. (15.9 L)	Yes	 
					120/208	13	2680	7.5 gal. (28.4 L)		
					120/240	15	3550	7.5 gal. (28.4 L)		
AXIOM Twin APS	38700.0013	23.5"H x 16"W x 17.7"D (59.7cm H x 40.6cm W x 44.9cm D)	64 lbs. (29 kg)	Stainless	120/240	26	6100	15 gal/hr (56.8 L/hr)		

SmartWAVE® Airpot Brewers

Low profile brewer featuring SmartWAVE technology, simple operation, and flexible server options



WAVE 15-S-APS (Silver)
(thermal carafe sold separately)



WAVE 15-APS
(airpot sold separately)



legs extended to accommodate 2.5L push-button airpot

Airpot/Carafe/Pitcher Usage Table

Brewer Position	BUNN Part #	Description	Brewer Height	Approx. Adjustment
Utilizing thermal carafe tray	36029.0001	1.9L deluxe thermal carafe	16.9"	N/A
Utilizing thermal carafe tray	40163.0000	1.9L economy thermal carafe	16.9"	N/A
LP feature (Lowest)	39430.0000	1.9L thermal pitcher	16.9"	N/A
LP feature (Lowest)	32125.0000	2.5L lever-action airpot	16.9"	N/A
Extend legs	32130.0000	3.0L lever-action airpot	17.5"	.6"
Extend legs	28696.0002	2.2L push-button airpot	18"	1"
Extend legs	13041.0001	2.5L push-button airpot	18.5"	1.5"
Extend legs	23300.0010	2.5L Thermal Server	18.5"	1.5"

COMMON FEATURES

- Brews 3.9 gallons (14.8 litres) of perfect coffee per hour.
- Brew into 1.9L thermal carafe brewer utilizing the slide-out booster tray.
- Adjustable legs to accommodate up to 3.0L lever action and 2.5L push button BUNN airpots (refer to usage table).
- SmartWAVE® technology increases turbulence in the brew funnel.
- Convenient airpots keep coffee hot and fresh for hours and are easily transported to remote serving areas.
- Ensures coffee brew quality with cold brew lock out capability.
- Hot water faucet.
- SplashGard® funnel deflects hot liquids away from the hand.
- Energy-saver mode reduces tank temperature during idle periods.

STANDARD VERSION

- Four-digit LED read-out for simple programming.
- Utilize the same LED read-out for brewer status (Ready, Heating, Brewing).
- 13 pulse brew routine selections adjust strength profile in conjunction with the BrewMETER®.
- Large funnel to accommodate a wide range of coffees and a 17-hole sprayhead to maximise turbulence and wetting.

SILVER VERSION

- Analog switches accompanied by red/green LED for programming.
- Red/green LED provide brewer status (ready, heating, brewing).
- Choice of three pulse brew routines to adjust your flavor profile.

SmartWAVE Low Profile Airpot Brewers

Model	Product #	Size		Funnel Type	Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
WAVE 15-APS	39900.0005	16.9"H x 8.7"W x 17.1"D (43cm H x 22.2cm W x 43.5cm D)	24.2 lbs. (11 kg)	Black Plastic	120	11.3	1350	3.9 gal. (14.8 L)	Yes	
WAVE 15-APS (Specialty)	39900.0012			Gourmet						
WAVE 15-S-APS	39900.0006			Black Plastic						
WAVE-APS	39900.0008			120/240	9.4	2250	6.4 gal (24.2 L)	No		
WAVE-S-APS	39900.0009									

Airpot Brewers



CWTF APS-DV (airpot sold separately) **CWTF APS** (airpot sold separately)

CWTF Twin APS (airpots sold separately)

PRODUCT FEATURES

- Brews directly into 1.9 to 3 litre airpots.
- Hot water faucet with pourover feature.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Use BUNN paper filters - Product No. 20115.0000. Gourmet funnel requires BUNN paper filter 20100.0000.

CWTF-DV FEATURES

- Voltage converts easily by flipping a switch.
- Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.*

 International electrical configurations (Single airpot brewer models only)

CWTF and Twin Airpot Brewers										
Model	Product #	Size		Funnel Type	Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
CWTF APS-DV	23001.0058	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	36 lbs. (16.3 kg)	Black Plastic	120	11.4	1370	3.9 gal/hr 14.6 L/hr	No	
					120/208		2340	6.7 gal/hr 25.3 L/hr		
					120/240	13.1	3100	7.5 gal/hr 28.4 L/hr		
	23001.0059		37 lbs. (16.7 kg)	Black Plastic and Stainless Steel	120	11.4	1370	3.9 gal/hr 14.6 L/hr		
					120/208		2340	6.7 gal/hr 25.3 L/hr		
					120/240	13.1	3100	7.5 gal/hr 28.4 L/hr		
CW15-APS (no faucet)	23001.0000 Pourover	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	28 lbs. (12.7 kg)	Black Plastic	120	11.4	1370	3.8 gal/hr 14.4 L/hr	Yes	UL LISTED NSF
	23001.0062 Pourover		29 lbs. (13.2 kg)	Black Plastic						
	23001.0003		38 lbs. (17.3 kg)	Stainless Steel						
CWTF15-APS	23001.0017	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	33 lbs. (15.0 kg)	Black Plastic	120	11.4	1370	3.8 gal/hr 14.4 L/hr	Yes	UL LISTED NSF
	23001.0006		37 lbs. (16.8 kg)	Gourmet Funnel						
	23001.0051		32 lbs. (14.6 kg)	Black Plastic						
CWTF20-APS	23001.0007	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	33 lbs. (15.0 kg)	Black Plastic	120	15	1850	5.1 gal/hr 19.3 L/hr	No	UL LISTED NSF
CWTF35-APS	23001.0008		37 lbs. (16.8 kg)	Gourmet Funnel						
	23001.0052		37 lbs. (16.8 kg)	Stainless Steel						
CWTF35-APS, SF	23001.0023	23.5"H x 16"W x 19.7"D (59.7cm H x 40.6cm W x 50.0cm D)	60 lbs. (27.3 kg)	Gourmet Funnel	120/240	26	6250	15 gal/hr 56.8 L/hr	No	UL LISTED NSF
CWTF Twin APS	23400.0041			60 lbs. (27.3 kg)	Gourmet Funnel	120/240	26	6250		
	23400.0046									

Thermal Carafe Coffee Brewers



CWTF15-TC
(thermal carafe
sold separately)



AXIOM-DV-TC
(thermal carafe
sold separately)



CWTF Twin-TC
(thermal carafe
sold separately)

AXIOM-DV-TC FEATURES

- Easily convertible by flipping a switch to:
 - 120 volt, 12.5 amp
 - 120/208 volt, 13 amp
 - 120/240 volt, 15 amp
- Brews 4.2 to 7.5 gallons (15.7 to 28.4 litres) of perfect coffee per hour.
- BrewWIZARD® technology simplifies brewer programming with a LCD display. Set brew level, pulse brew, cold brew lock-out and tank temperature from the front of the machine.

CWTF-TC FEATURES

- Accepts thermal carafe up to 8.5" tall (21.6cm) (sold separately).
- Use in quick-turn environment where high quality coffee is continuously refreshed.
- SplashGard® funnel deflects hot liquids away from the hand.



International electrical configurations

CWTF TWIN-TC BREWER FEATURES

- Accepts thermal carafe up to 8.5" (21.6 cm) tall (sold separately).
- Use in quick-turn environment where high quality coffee is continuously refreshed.
- All stainless steel construction.
- SplashGard® funnel deflects hot liquids away from the hand.
- Pourover feature.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Thermal Carafe Coffee Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
AXIOM-DV-TC	38700.0011	17.9" H x 9" W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	30 lbs. (13.6 kg)	120	12.5	1500	4.2 gal/hr (15.9 L/hr)	Black Plastic	Yes	
				120/208	13	2680	7.5 gal/hr (28.4 L/hr)			
				120/240	15	3550	7.5 gal/hr (28.4 L/hr)			
CW15-TC (no faucet)	23001.0040 Pourover	17.9" H x 9" W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	28 lbs. (12.7 kg)	120	11.4	1370	3.9 gal/hr (14.6 L/hr)	Stainless Steel	No	
CWTF15-TC	12950.0360		32 lbs. (14.5 kg)				7.5 gal/hr (28.4 L/hr)			
CWTF20-TC	12950.0380		31 lbs. (14.1 kg)	120	15.4	1850	5.3 gal/hr (19.9 L/hr)			
CWTF35-TC	12950.0379		32 lbs. (14.5 kg)	120/ 208-240	15	3550	7.5 gal/hr (28.4 L/hr)			
CWTF Twin-TC	23400.0047		17.2" H x 16" W x 22.5" D (43.7cm H x 41cm W x 57.2cm D)	64 lbs. (29.3 kg)	120/240	26	6250			15 gal/hr (56.8 L/hr)
CWTF-TC DV	23001.0069	17.9" H x 9" W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	29 lbs. (13.2 kg)	120	11.4	1370	3.9 gal/hr (14.6 L/hr)	Black Plastic		
				120/208	11.4	2340	6.7 gal/hr (25.3 L/hr)			
				120/240	13.1	3100	7.5 gal/hr (28.4 L/hr)			

Airpots and Thermal Carafes



Push-Button Airpot



Lever-Action Airpot



Thermal Carafe



Economy Thermal Carafe



Vacuum Pitcher

PUSH-BUTTON AIRPOT FEATURES

- Brew-through pump assembly
- Just close the lid after brewing – dispenses up to 4 ounces (.12 litres) at the first pump.
- Glass insulation keeps beverage hot.

LEVER-ACTION AIRPOT FEATURES

- Stainless steel lining keeps coffee hot.
- Brew-through lid with lever-action for easy use.

THERMAL CARAFE FEATURES

- Holds 1.9 litres or 64 ounces (12 cups) of coffee or other hot beverage.
- Unbreakable stainless steel interior and exterior.
- Superior vacuum insulation keeps beverages hot for hours.
- Brew-through lid allows direct brewing.
- Fits on BUNN Thermal Carafe and Twin Thermal Carafe brewers.

See page 64 for universal airpot racks and coffee-isers.

Airpots & Thermal Carafes							
Model	Product #	Size		Liner	Quantity	Capacity	Agencies
		Dimension	Weight				
2.2 litre Push-Button Airpot	28696.0002	16.4" H x 6.1" W x 7.9" D (42cm H x 16cm W x 20cm D)	4.5 lbs. (2.04 kg)	Glass	single unit	2.2 litres (74 oz)	
	28696.0000		24 lbs. (10.9 kg)		6 units/ case		
2.5 litre Push-Button Airpot	13041.0001	14.6" H x 6.3" W x 9" D (37cm H x 16cm W x 23cm D)	5 lbs. (2.3 kg)		single unit	2.5 litres (84 oz.)	
	13041.0101		25 lbs. (11.3 kg)		6 units/ case		
2.5 litre Lever-Action Airpot	32125.0000		5.3 lbs. (2.4 kg)	single unit			
	32125.0100		32 lbs. (14.6 kg)	6 units/ case			
3.0 litre Lever-Action Airpot	32130.0000	15.5" H x 6.3" W x 9" D (39.4cm H x 16cm W x 23cm D)	5.8 lbs. (2.6 kg)	single unit	3.0 litres (102 oz.)		
	32130.0100		35 lbs. (15.9 kg)	6 units/ case			
3.8 litre Lever-Action Airpot	36725.0000	(17.6" H x 6.3" W x 9" D) (44.7cm H x 16cm W x 23cm D)	7 lbs. (3.2 kg)	single unit	3.8 litres (128 oz)		
	36725.0100		41 lbs. (18.6 kg)	6 units/ case			
1.9 litre Thermal Carafe (Black Lid)	36029.0001	8" H x 6.4" W x 8.2" D (20.3cm H x 16.3cm W x 21cm D)	3.0 lbs. (1.36 kg)	Stainless Steel	single unit	1.9 litres (64 oz.)	
	36029.0000		34 lbs. (15.4 kg)		12 units/ case		
1.9 litre Thermal Carafe (Orange Lid)	36252.0001		3.0 lbs. (1.36 kg)		single unit		
	36252.0000		34 lbs. (15.4 kg)		12 units/ case		
1.9 litre Economy Thermal Carafe (Black Lid)	40163.0000	7.1" H x 6.6" W x 8.64" D (18cm H x 16.8cm W x 21.9cm D)	2.5 lbs. (1.1 kg)	Stainless Steel	single unit	1.9 litres (64 oz.)	
	40163.0100		30 lbs. (13.6 kg)		12 units/ case		
1.9 litre Economy Thermal Carafe (Orange Lid)	40163.0001		2.5 lbs. (1.1 kg)		single unit		
	40163.0101		30 lbs. (13.6 kg)		12 units/ case		
1.9 litre Vacuum Pitcher (Black Lid)	39430.0000	11.3" H x 6.5" W x 5.5" D (28.7cm H x 16.5cm W x 14cm D)	3.0 lbs. (1.36 kg)	Stainless Steel	single unit	1.9 litres (64 oz.)	
	39430.0100		17 lbs. (7.71 kg)		6 units/case		

Thermal Coffee Brewers, Servers and Stands



CWTF-TS
(Server sold separately)



TSR-1 and TSR-2
(shown with
TS servers no base)



TS Booster



TSR
(Raised)

PRODUCT FEATURES

- Pourover feature included on automatic brewer models.
- Internal stainless steel components.
- Hot water faucet available.
- SplashGard® funnel deflects hot liquids away from the hand.
- Holds up to 4" (10.16 cm) tall cup.
- Use BUNN paper filters – Product No. 20115.0000.

THERMAL SERVER FEATURES

- Convenient for keeping coffee hot and for hours.
- Easily transported to remote locations.
- Depending on base, server can hold up to 6½" (16.51 cm) cup.

THERMAL SERVER RACK FEATURES

- Holds one or two 2.5 litre thermal servers without base.
- Made of durable, easy-to-clean plastic with drip trays to catch spills and keep serving areas clean.



International electrical configurations

Thermal Server Coffee Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
CW15-TS (Pourover)	23000.0000	27.6" H x 9" W x 18.5" D (70.1cm H x 22.9cm W x 47cm D)	27 lbs. (12.3 kg)	120	11.4	1370	3.9 gal/hr. (14.6 L/hr)	Yes	
CWTF15-TS (Automatic w/faucet)	23000.0006		32 lbs. (14.6 kg)						

Thermal Servers and Stands

Model	Product #	Size		Capacity	Quantity	Agencies
		Dimension	Weight			
TS	23300.0007	19.6" H x 7.9" W x 8.7" D (49.8cm H x 20.1cm W x 22.1cm D)	6 lbs. (2.7 kg)	2.5 litres (84 oz.)	single unit	
	23300.0005		33 lbs. (15 kg)		6/case	
TSR (Raised)	23300.0009	21.8" H x 7.9" W x 8.9" D (55.4cm H x 20cm W x 22.6cm D)	6 lbs. (2.7 kg)		single unit	
TS (no base)	23300.0010	14.4" H x 7" W x 8.1" D (36.6cm H x 17.8cm W x 20.6cm D)	4 lbs. (1.8 kg)		6/case	
	23300.0006		25 lbs. (11.3 kg)			
BUNN Safety-Fresh® Lid (Kit)	22964.0000	n/a	1 lb. (.5kg)		single unit	
TSR-1	18008.6001	25" H x 7.5" W x 8.5" D (63.5cm H x 19.1cm W x 21.6cm D)	4.5 lbs. (2.1 kg)	1 Thermal Server w/out Base	n/a	
TSR-2	18008.6002	28.5" H x 7.5" W x 17" D (72.4cm H x 19.1cm W x 43.2cm D)	8 lbs. (3.6 kg)	2 Thermal Servers w/out Bases		
TS Booster	18010.6000	6" H x 9.25" W x 8.25" D (15.2cm H x 23.5cm W x 21cm D)	2 lbs. (.9 kg)	1 Thermal Server w/out Base		No Lis ing

AXIOM® Coffee Brewers

Medium volume brewing solution featuring simple operation, precise extraction control and a variety of portable servers

Automatic
Decanter Coffee Brewers and Urns



AXIOM-DV-3
(2 upper warmers,
1 lower warmer - 2U, 1L)
(Decanters sold separately)

PRODUCT FEATURES

- Large 200 oz. (5.9 litres) tank provides back-to-back brewing capacity.
- Dual voltage available on some models. Can operate at 120V/15 amp or 120/208-240V/20 amp.
- Adjusts automatically to varying water pressure.
- BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels even in high lime areas.
- BrewWIZARD® technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front panel.
- Digital temperature control and accuracy.
- Ensures coffee brew quality with cold brew lock out capability.
- Electronic diagnostics and built in tank drain make service easier.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Energy-saver mode reduces tank temperature during idle periods.
- Use BUNN paper filters – Product No. 20115.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

AXIOM Coffee Brewers with Upper/Lower Warmers

Model	Product #	Size		Electrical			Brewing Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
AXIOM-15-3	38700.0000	18.9"H x 8.5"W x 17.7"D (49cm H x 21.6cm W x 44.9cm D)	30 lbs. (13.6 kg)	120	15	1800	4.2 gal/hr 15.9 L/hr	Plastic	Yes	 
AXIOM-35-3	38700.0001			120/240	17.5	3850	7.5 gal/hr 28.4 L/hr		No	
AXIOM-DV-3	38700.0008			120	15	1800	4.2 gal/hr 15.9 L/hr		Yes	
				120/208	15.5	2980	7.5 gal/hr 28.4 L/hr			
				120/240	17.5	3850				

AXIOM[®] Coffee Brewers

Medium volume brewing solution featuring simple operation, precise extraction control and a variety of portable servers



AXIOM-15-3
(3 lower warmer - 3L)
(Decanters sold separately)

PRODUCT FEATURES

- Large 200 oz. (5.9 litres) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGIC[®] technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD[®] technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front panel.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard[®] funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion, pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Energy-saver mode reduces tank temperature during idle periods.
- Hot water faucet.
- Dual voltage available. Can operate at 120V/15 amp or 120/208-240V/20 amp.
- Use BUNN paper filters – Product No. 20115.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

AXIOM Coffee Brewers with Lower Warmers

Model	Product #	Size		Electrical			Brewing Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
AXIOM-15-3	38700.0002	16.8"H x 16.5"W x 17.7"D (42.7cm H x 41.9cm W x 45cm D)	31 lbs. (14.1 kg)	120	15	1800	4.2 gal/hr 15.9 L/hr	Plastic	Yes	 
AXIOM-35-3	38700.0003			120/240	17.5	3850	7.5 gal/hr 28.4 L/hr		No	
AXIOM-DV-3	38700.0009	18.9"H x 8.5"W x 17.7"D (48cm H x 21.6cm W x 44.9cm D)	32 lbs. (14.5 kg)	120	15	1800	4.2 gal/hr 15.9 L/hr		Yes	
				120/208	15.5	2980	7.5 gal/hr 28.4 L/hr			
				120/240	17.5	3850				

Decanter Coffee Brewers



CWTF
(2 upper warmers,
1 lower warmer - 2U, 1L)
(Decanters sold separately)



CWTF
(1 upper warmer,
1 lower warmer - 1U, 1L)
(Decanters sold separately)

PRODUCT FEATURES

- All stainless steel construction.
- CWTF models feature hot water faucet and pourover backup on all models.
- SplashGard® funnel deflects hot liquids away from the hand.
- Use BUNN paper filters – Product No. 20115.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations (CWTF only)

12 Cup Coffee Brewers with Upper/Lower Warmers

Model	Product #	Size		Electrical			Brewing Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
CWTF15	12950.0211 (1U, 1L)	18.9"H x 8.5"W x 17.8"D (48cm H x 21.6cm W x 45.2cm D)	32.5 lbs. (14.5 kg)	120	13	1570	3.9 gal/hr 14.6 L/hr	Plas ic	Yes	 
CWT15 (no faucet)	12950.0356 (2U, 1L)		30 lbs. (13.6 kg)		13.9	1670				
CWT20 (no faucet)	12950.0291 (2U, 1L)				17.9	2150	5.3 gal/hr 19.9 L/hr	Stainless	No	
CWT35 (no faucet)	12950.0292 (2U, 1L)			120/208-240	17.1	3850				
CWTF15-3	12950.0213 (2U, 1L)		33 lbs. (14.97 kg)	120	13.9	1670	3.9 gal/hr 14.6 L/hr	Plas ic	Yes	
	12950.0217 (2U, 1L)		34 lbs. (15.4 kg)							
CWTF20-3	12950.0283 (2U, 1L)		31 lbs. (14.1 kg)	120/240	17.9	2150	5.3 gal/hr 19.9 L/hr	Stainless	No	
CWTF35-3	12950.0253 (2U, 1L)		30 lbs. (13.6 kg)							
	12950.0261 (2U, 1L)		32 lbs. (14.5 kg)							
CWTF-DV	12950.0410 (2U, 1L)		35 lbs. (15.9 kg)	120	13.9	1670	3.9 gal/hr 14.6 L/hr	Stainless	No	
		120/208		13.9	2640	6.7 gal/hr 25.3 L/hr				
		120/240		15.6	3400	7.5 gal/hr 28.4 L/hr				

Decanter Coffee Brewers



CWTF
(3 lower warmers - 3L)
(Decanters sold separately)



A10
(Includes decanter)

PRODUCT FEATURES

- All stainless steel construction.
- CWTF models feature pourover backup on all models.
- SplashGard® funnel deflects hot liquids away from the hand.
- Use BUNN paper filters – Product No. 20115.0000.
- Low profile for under cabinet placement.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations (CWTF only)

A10 MODEL FEATURES

- Uses 50 oz. decanter.
- Use BUNN paper filters - Product No. 20106.0000.

12 Cup Coffee Brewers with Lower Warmers

Model	Product #	Size		Electrical			Brewing Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
CWTF15	12950.0293 (1L)	17"H x 16.5"W x 17.9"D (43.3cm H x 41.9cm W x 45.2cm D)	27 lbs. (12.2 kg)	120	12.3	1470	3.9 gal/hr 14.6 L/hr	Plastic	Yes	 
CWTF15 (left warmers)	12950.0298 (3L)		35 lbs. (15.9 kg)							
CWTF35	12950.0381 (3L)		39 lbs. (17.7 kg)	120/208-240	17.1	3850	7.5 gal/hr 28.4 L/hr	Stainless	No	
CWT15-3 (no faucet)	12950.0112 (3L)		32 lbs. (14.5 kg)	120	13.9	1670	3.9 gal/hr 14.6 L/hr	Plastic	Yes	
CWTF15-3	12950.0212 (3L)		35 lbs. (15.9 kg)							
	12950.0216 (3L)		36 lbs. (16.4 kg)							
CWTF20-3	12950.0232 (3L)		35 lbs. (15.9 kg)	120/240	16	3850	5.3 gal/hr 19.9 L/hr	Plastic	No	
CWTF35-3	12950.0252 (3L)	35 lbs. (15.9 kg)	7.5 gal/hr 28.4 L/hr							
CWTF-DV	12950.0409 (3L)	39 lbs. (17.7 kg)	120	15	1800	3.9 gal/hr 14.6 L/hr	Stainless	No		
			120/208	15.5	2980	6.7 gal/hr 25.3 L/hr				
			120/240	17.5	3850	7.5 gal/hr 28.4 L/hr				
A10A (pourover)	21250.0004	14.7" H x 6.7" W x 12.9" D (37.3cm H x 17.0cm W x 32.8cm D)	16 lbs. (7.3 kg)	120	9.5	1140	2.9 gal/hr 11 L/hr	Black	Yes	

Decanter and AXIOM® Coffee Brewers

Medium volume brewing solution featuring simple operation, precise extraction control and a variety of portable servers



CWTF Twin
(0/6 Twin)
(Decanters sold separately)



CWTF Twin
(2/2 Twin)
(Decanters sold separately)



AXIOM Twin
(0/6 Twin)
(Decanters sold separately)



AXIOM Twin
(4/2 Twin)
(Decanters sold separately)

CWTF FEATURES

- Medium volume, twin brew head systems.
- Four or six individually controlled warming stations.
- All stainless steel construction.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.
- Use BUNN paper filters - Product No. 20115.0000.

AXIOM FEATURES

- Twin brew head systems.
- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Six individually controlled warmers.
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD® technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front panel.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Electronic diagnostics and built-in tank drain make service easier.
- Coffee extraction controlled with programmable pre-infusion and pulse brew features.
- Use BUNN paper filters – Product No. 20115.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations (CWTF only)

12 Cup Coffee Brewers with 4 or 6 Warmers

Model	Product #	Size		Electrical			Legs	Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
CWTF 2/2 Twin	23400.0001	19.3"H x 16.5"W x 19.8"D (49cm H x 41.9cm W x 50.3cm D)	56 lbs. (25.4 kg)	120/240	27.7	6650	n/a	15 gal/hr 56.8 L/hr	No	 
CWTF 4/2 Twin	23400.0011				28.5	6850				
CWTF 0/6 Twin	23400.0020	20.54" H x 30.75" W x 20.64" D (52.17cm H x 78.11cm W x 50.43cm D)	74 lbs. (33.6 kg)		28.5	6850	4" satin nickel legs			
AXIOM 4/2 Twin	38700.0014	19.1"H x 16.4"W x 17.7"D (48.5cm H x 41.7cm W x 44.9cm D)	61 lbs. (27.7 kg)	120/ 208-240	27.9	6700	n/a			
AXIOM 0/6 Twin	38700.0015	20.5" H x 30.3" W x 17.7" D (52.1cm H x 77cm W x 45cm D)	74 lbs. (33.6 kg)				4" black legs			

Automatic Brewers



OL
(Decanters sold separately)

OT
(Decanters sold separately)

OT/OL FEATURES

- Two separately controlled warmers.
- Designed to function well in low or uneven water pressure situation. (OL models)
- All stainless steel construction.
- OL models can also be operated as a pourover unit.
- Faucet kit available.
- SplashGard® funnel deflects hot liquids away from the hand.
- Use BUNN paper filters - Product No. 20115.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.



VLPF
(Decanters sold separately)

VLPF FEATURES

- Internal stainless steel components.
- Two individually controlled warmers.
- SplashGard® deflects hot liquids away from the hand.
- Use BUNN paper filters - Product No. 20115.0000.

Automatic Brewer with 2 Warmers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
OL 20	20820.0001	23.5" H x 12" W x 18.5" D (59.7cm H x 30.5cm W x 47cm D)	34 lbs. (15.5 kg)	120	17	2050	6 gal/hr 22.7 L/hr	No	 
OL 35	20820.0002			120/240	15.6	3750	7.5 gal/hr 28.4 L/hr		
OT 15	20830.0000	22.4" H x 12" W x 18.3" D (56.9cm H x 30.5cm W x 46.5cm D)	32.7 lbs. (14.8 kg)	120	13	1570	4.2 gal/hr 15.7 L/hr	Yes	
OT 20	20830.0001				17.4	2090	5.3 gal/hr 19.9 L/hr	No	
VLPF	07400.0005	17.4" H x 23.5" W x 13.1" D (44.2cm H x 59.7cm W x 33.3cm D)	26.3 lbs. (11.9 kg)	120	13.3	1600	3.9 gal/hr 14.6 L/hr	Yes	

Decanter Coffee Brewers



CRTF
(Decanters sold separately)

PRODUCT FEATURES

- Five separately controlled warmers.
- All stainless steel construction.
- Models available with faucet. Faucet kits available for existing models.
- SplashGard® funnel deflects hot liquids away from the hand.
- Designed to function well in low water pressure situations, the RL model can also be operated as a pourover unit.
- CRTF model has hot water faucet and pourover feature.
- Use BUNN paper filters - Product No. 20115.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations (RL only)



RL
(Decanters sold separately)



RT
(Decanters sold separately)

12 Cup Coffee Brewer with 5 Warmers

Model	Product #	Size		Electrical			Funnel Type	Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
CRTF5-35	13250.0023	17.1" H x 24 5" W x 18.2" D (43.4cm H x 62.2cm W x 46.2cm D)	50.2 lbs. (22.8 kg)	120/240	16.9	4050	Plastic	7.5 gal/hr 28.4 L/hr	No	 
CRTF5-35	13250.0025		48 lbs. (21.8 kg)							
RT	20835.0000	21.2" H x 24" W x 18.5" D (53.8cm H x 61cm W x 47cm D)	42 lbs. (19.1 kg)							
RTF (w/faucet)	20835 0004	46 lbs. (20.9 kg)								
RL	20825 0000	23.5" H x 24" W x 18.5" D (59.7cm H x 61cm W x 47cm D)	44 lbs. (20.0 kg)							

Coffee Urns



SRU

3 GALLON URN FEATURES

- Automatic drip brewing of delicious coffee every time.
- Large water tank holds over 10 gallons.
- Draw off hot water during brewing cycle without affecting delivery of coffee.
- All stainless steel construction.
- Brews full or half batches.
- Top mounted components ease service.
- Use BUNN paper filters - Product No. 20109.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations

TWIN 3 GALLON FEATURES

- Unique design assures extremely low evaporation loss to maintain the brew at its flavorful peak.
- Large water tank holds over 20 gallons.
- Draw off hot water during brewing cycle without affecting coffee quality.
- Half-batch option.
- Top mounted components ease service.
- All stainless steel construction.
- Use BUNN paper filters - Product No. 20109.0000.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

 International electrical configurations



U3

Coffee Urns

Model	Product #	Size		Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
SRU	06325.0001	33.5" H x 14" W x 24.6" D (85.1cm H x 35.6cm W x 62.5cm D)	73 lbs. (33.1 kg)	120/208	19.4	4025	11.4 gal/hr.	No	 
	75 lbs. (34.0 kg)		120/240	16.8					
U3 (Single Serve)	20500.0000	32.4" H x 34.5" W x 21" D (82.3cm H x 87.6cm W x 53.3cm D)	103 lbs. (46.8 kg)	120/208	28	5825	16.3 gal/hr.	No	 
	20500.0001		120/240	6725		18.8 gal/hr.			

Pourover Coffee Brewers



VP17-1
(Decanter sold separately)



A10
(Includes decanter)

COMMON FEATURES

- Internal stainless steel components.
- Requires no plumbing – completely portable.
- Just pour cold water in top and coffee brews immediately.
- Automatic models are connected to waterline.

A10 MODEL FEATURES

- Uses 50 oz. decanter.
- Use BUNN paper filters - Product No. 20106.0000.

VP17-1 FEATURES

- SplashGard® funnel deflects
- Use BUNN paper filters - Product No. 20115.0000.

VP MODEL FEATURES

- Two separately controlled warmers.
- SplashGard® funnel
- Use BUNN paper filters - Product No. 20115.0000.

 International electrical configurations



VP17-2
(Decanters sold separately)



VP17-2 SS
(Decanters sold separately)



VPR
(Decanters sold separately)

Pourover Coffee Brewers with 1 Warmer										
Model	Product #	Size		Finishes	Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
VP17-1 SS	13300.0001	17.8" H x 8" W x 17.7" D (45.2cm H x 21.6cm W x 44.96cm D)	23 lbs. (10.5 kg)	Stainless	120	13.3	1600	3.9 gal/hr 14.6 L/hr	Yes	
VP17-1 BLK	13300.0011		21 lbs. (9.6 kg)							
A10 (pourover)	21250.0000	14.7" H x 6.7" W x 12.9" D (37.3cm H x 17.0cm W x 32.8cm D)	14 lbs. (6.4 kg)		120	9.5	1140	2.9 gal/hr 11 L/hr		
Pourover Coffee Brewers with 2 Warmers										
Model	Product #	Size		Finishes	Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight		Volts	Amps	Watts			
VP17-2 SS	13300 0002	18.9" H x 8.5" W x 17.8" D (48cm H x 21.6cm W x 45.2cm D)	24 lbs. (10.9 kg)	Stainless	120	13.3	1600	3.9 gal/hr 14.6 L/hr	Yes	
VP17-2 BLK	13300 0012		23 lbs. (10.5 kg)							
VPR-Black	33200 0000	20.7" H x 16 2" W x 8" D (52.6cm H x 41.15cm W x 20.3cm D)	24 lbs. (10.9 kg)	Black	120	13.1	1575	3.9 gal/hr 14.6 L/hr	Yes	
	33200 0015 (inc. 2 glass decanters)									
	33200 0002 (inc. 2 Easy Pour decanters)									

Pourover Coffee Brewers



VPS
(Decanters sold separately)

PRODUCT FEATURES

- Requires no plumbing – completely portable.
- Just pour cold water in top and coffee brews immediately.
- Three separately controlled warmers.
- SplashGard® funnel deflects hot liquids away from the hand.
- Use BUNN paper filters - Product No. 20115.0000.

 International electrical configurations (VP17-3 only)



VP17-3
(Decanters sold separately)



VP17-3
(Decanters sold separately)

Pourover Coffee Brewers with 3 Warmers

Model	Product #	Size		Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
VPS-Black	04275.0031	19.8" H x 23.5" W x 8" D (50.1cm H x 59.7cm W x 20.3 cm D)	26 lbs. (11.8 kg)	120	13.8	1660	3.9 gal/hr 14.6 L/hr	Yes	 
VP17-3 SS (3 lower)	13300.0003	17.8" H x 16.4" W x 17.7" D (45.2cm H x 41.7cm W x 45cm D)	29 lbs. (13.2 kg)		13.3	1600			
VP17-3 BLK (3 lower)	13300.0013		32 lbs. (14.5 kg)						
VP17-3 SS (2 upper)	13300.0004	18.9" H x 8.5" W x 17.7" D (48cm H x 21.6cm W x 45cm D)	25 lbs. (11.4 kg)						

Pourover Coffee Brewers



VPR-APS
(Airpot sold separately)



VPR-TC
(Thermal carafe sold separately)

VPR-APS FEATURES

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Internal components are constructed from stainless steel.
- Pourover brewer requires no plumbing – completely portable.
- Pour cold water in and coffee brews immediately.
- Accommodates 1.9 to 3 litre airpots.
- Convenient airpot keeps coffee hot and for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Integral to any office coffee service.
- SplashGard® funnel deflects hot liquids away from the hand.

VPR-TC FEATURES

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Internal components are constructed from stainless steel.
- Pourover brewer requires no plumbing – completely portable.
- Pour cold water in and coffee brews immediately.
- Accommodates thermal carafe up to 8.5” (21.6 cm) tall.
- Use in quick turn environment where high quality coffee is continuously refreshed.
- Integral part of any office coffee service program.
- SplashGard® funnel deflects hot liquids away from the hand.

Pourover Airpot and Thermal Carafe Coffee Brewers

Model	Product #	Size		Electrical			Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
VPR-APS	33200.0010	26.6" H x 15.9" W x 8" D (67.6cm H x 40.4cm W x 20.3cm D)	23 lbs. (10.4 kg)	120	11.5	1375	3.8 gal./hr 14.4 L/hr	Black Plastic	Yes	
VPR-APS (2.2 L airpot included)	33200.0014									
VPR-TC	33200.0011	21.3" H x 15.9" W x 8" D (54.1cm H x 40.4cm W x 20.3cm D)	23 lbs. (10.4 kg)							

Pourover Airpot and Thermal Server Coffee Brewers



CW15 - APS
(Airpot sold separately)



CW15 - TS
(Thermal server sold separately)



CW15-TC
(Thermal carafe sold separately)

CW15-APS FEATURES

- Brews directly into 1.9 to 2.5 litre airpots.
- Convenient airpots keep coffee hot and for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Use BUNN paper filters - Product No. 20115.0000.

 International electrical configurations

CW15-TS FEATURES

- Convenient thermal servers keep coffee hot and for hours.
- Thermal servers are easily transported to remote meeting rooms, breakfast bars, etc.
- Internal components are constructed from stainless steel.
- SplashGard® funnel deflects hot liquids away from the hand.
- Holds up to 4" (10.16 cm) cup.
- Use BUNN paper filters - Product No. 20115.0000.

CW15-TC

- Brews 3.8 to 7.5 gallons (14.4 to 28.4 litres) of perfect coffee per hour.
- Accepts thermal carafe up to 8.5" tall (21.6cm).
- Use in quick turn environment where high quality coffee is continuously refreshed.
- Models are space saving 9" wide (22.9cm).
- All stainless steel construction.
- SplashGard® funnel deflects hot liquids away from the hand.
- CWTF model has pourover feature.

Pourover Airpot and Thermal Server Coffee Brewers

Model	Product #	Size		Electrical			Capacity	Funnel Type	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
CW15-TS	23000.0000	27.6" H x 9" W x 18.5" D (70.1cm H x 22.9cm W x 47cm D)	27 lbs. (12.3 kg)	120	11.4	1370	3.9 gal./hr 14.6 L/hr	Black Plastic	Yes	 
CW15-APS	23001.0000	23.6" H x 9" W x 18.5" D (59.9cm H x 22.9cm W x 47cm D)	28 lbs. (12.7 kg)					Gourmet Funnel		
	23001.0062							Black Plastic		
CW15-TC	23001.0040	17.9" H x 9" W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	28 lbs. (12.7 kg)							

Multi-Hopper Grinders

A superior coffee grinding system combines the ability to grind multiple coffees with patented BrewWISE® Technology



MHG
(funnel sold separately)



MHG

PRODUCT FEATURES

- Three-year warranty on grinding burrs.
- Convenient, front-loading hoppers.
- Stores individual coffee grind weights.
- Portion controlled for the right amount of coffee, with three batch sizes per hopper.
- Precision burrs for consistent, commercial quality grind.
- Easy-to-clean removable hoppers.
- LCD alphanumeric display shows coffee names and diagnostics.
- Accommodates all BrewWISE® Smart Funnels®.
- Smart Hopper® manages the grinding and brewing process from start to finish through a microchip.
- Create coffee recipe cards with BrewWISE recipe writer on your PC. See page 4.
- Compatible with BUNNlink®.

 International electrical configurations

RACK AND HOPPER FEATURES

- Racks help store and display coffee varieties and promote fresh ground coffee program.
- Hoppers serve as storage containers when not in the grinder. Locking lid prevents tampering.



2 Position Storage System
(hoppers sold separately)



4 Position Storage System
(hoppers sold separately)



Hopper Assembly

Multi-Hopper Grinders									
Model	Product #	Size		Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
MHG (SST)	35600.0000	29.1" H x 9.4" W x 17.5" D (73.9cm H x 23.8cm W x 44.5cm D)	70 lbs. (31.8 kg)	120	11	1320	6 lbs./hopper 2.7 kg/hopper	Yes	
MHG (Black)	35600 0002								
2 Position Rack	36760 0000	11.37" H x 9.76" W x 15.74" D (28.88cm H x 24.79cm W x 39.98cm D)	4.3 lbs. (2.0 kg)	n/a			2 hoppers	n/a	n/a
4 Position Rack	36760 0001	24.25" H x 9.76" W x 15.74" D (61.6cm H x 24.79cm W x 39.98cm D)	6.4 lbs. (2.9 kg)						
Hopper Assembly	36845 0000	11.75" H x 4.23" W x 15.9" D (29.85cm H x 10.74cm W x 4.39cm D)	5 lbs. (2.3 kg)						

Portion Control Grinders



G9-2 HD



G9HD



G9-2T DBC



G9WD-RH

FEATURES

- Three-year warranty on grinding burrs.
- Portion controlled for the right amount of coffee every time.
- Precision burrs for consistent, commercial-quality grind.
- G9T HD model has optional interface to BUNN brewers for multiple batch sizes.
- The G9T HD and G92T HD accommodate larger brew funnels.



International electrical configurations

BREWWISE® DBC GRINDER

- Stores individual coffee grind profiles.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface via Smart Funnel® and Dual Soft Heat® DBC brewer.
- Portion controlled for the right amount of coffee every time with three batch sizes per hopper.
- Compatible with BUNNlink®.



International electrical configurations

WEIGHT DRIVEN GRINDER

- Weight-based, portion-control for the right amount of coffee every time, with 3 batch sizes.
- Hopper holds up to 6 lbs. (2.72 kg.).
- Precision burrs for consistent, commercial quality grind.
- LCD alphanumeric display shows machine status and diagnostics.

Portion Control Grinders with 1 or 2 Hoppers

Model	Product #	Size		Electrical			Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
G9HD (Analog)	05800.0001	22.3" H x 8" W x 17.8" D	62 lbs. (28.1 kg)	120	9.4	1128	Stainless	ONE HOPPER	Yes	
	05800.0013	(63.5cm H x 20.3cm W x 45.2 cm D)					Black			
G9T HD (Analog)	05800.0003	27" H x 8" W x 17.8" D	67 lbs. (30.4 kg)				9 lbs. (4.1 kg.)	Stainless		
G9T HD (Brewer Interface)	05800.0027	(68.6cm H x 20.3cm W x 45.2 cm D)								
G9-2 HD (Brewer Interface)	24250.0000	25" H x 8" W x 17.8" D	67 lbs. (30.4 kg)				TWO HOPPERS	Stainless		
G9HD-S (Analog)	24250.0011	(63.5cm H x 20.3cm W x 45.2cm D)								
G9-2T HD (Brewer Interface)	24250.0021	27.1" H x 8" W x 17.8" D	68 lbs. (30.9 kg)				6 lbs./hopper (2.7 kg/hopper)	Stainless		
G9-2T DBC (Wireless interface)	33700.0000	(63.5cm H x 20.3cm W x 45.2 cm D)								
	33700.0001		67 lbs. (30.4 kg)				Black			
G9WD-RH	40700.0001	29.8"H x 8.14"W x 19.3"D	70 lbs. (31.8 kg)				11	Black		
	40700.0002	(75.7cm Hx 20.7cm W x 49.0cm D)								

Grinders



LPG



LPG-2



FPG

(French press pot not available)



FPG-2 DBC

(French press pot not available)

LPG FEATURES

- Low profile design.
- Professional grind provided by large 3.19" (81 mm) diameter burrs.
- Powered by quiet, high-torque motor.
- Three-year warranty on grinding burrs.
- Two hoppers allow for regular and decaf or specialty beans. (LPG-2)

 International electrical configurations

FPG FEATURES

- Accommodates up to 8" (20.3 cm) tall French press or funnel for drip-style brewer.
- Multi-batch setting allows users to specify a French press brew size or grind enough coffee into a funnel to brew up to 3.0 litres of drip-style coffee.
- Professional grind provided by large 3.19" (81 mm) diameter commercial grinding burrs powered by quiet, high torque motor.
- Digital touchpad for front of machine programming and LCD read-out. (FPG-2 DBC)
- Three-year warranty on grinding burrs.
- Can accommodate gourmet funnel (34559.0000 or 34559.0001) for heavier throw weights.

 International electrical configurations (FPG only)

Low Profile Portion Control Grinders with 1 or 2 Hoppers

Model	Product #	Size		Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
LPG	20580.0001	15.1" H x 8.64" W x 10" D (38.4cm H x 21.95cm W x 25.4cm D)	23 lbs. (10.5 kg)	120	3	360	6 lbs. 2.7 kg.	Yes	
LPG2E	26800.0000	17.5" H x 8.6" W x 11" D (44.5cm H x 21.84cm W x 27.94cm D)	28 lbs. (12.7 kg)		3.5	420	3 lbs./hopper 1.4 kg.		
LPG2E w/4" SS legs	26800.0001		30 lbs. (13.6 kg)						

French Press Grinder with 1 or 2 Hoppers

Model	Product #	Size		Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
FPG-2 DBC	36400.0000	21.8" H x 8.6" W x 11" D (55.4cm H x 21.84cm W x 28cm D)	31 lbs. (14.06 kg)	120	3.5	420	3 lbs./hopper 1.4 kg./hopper	Yes	
FPG	36800.0000	20" H x 8.6" W x 10" D (50.8cm H x 21.8cm W 25.4cm D)	30 lbs. (13.6 kg)				6 lbs./hopper 2.7 kg./hopper		

Bulk Coffee Grinders



G2 HD



G1 HD



G3 HD

PRODUCT FEATURES

- Turbo action draws coffee through grind chamber for greater grinding efficiency.
- Grinds one pound in under 30 seconds.
- Wide range of grinds can be selected.
- Convenient cleaning lever ensures complete clean out of grind chamber.
- Bag switch prevents grinding before bag is in place.
- Heavy-duty precision burrs for quality, finer grinds.
- Three-year warranty on grinding burrs.

 International electrical configurations (G2 and G3 only)

Bulk Coffee Grinders									
Model	Product #	Size		Electrical			Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
G1 HD Black	22104.0000	22.7" H x 7.3" W x 16" D (57.9cm H x 18.54cm W x 40.64cm D)	57 lbs. (15.9 kg)	120	9	1080	1 lb. .45 kg.	Yes	 
G1 HD Red	22104.0001						2 lbs. .9 kg.		
G2 HD Black	22102.0000	26.4" H x 7.3" W x 16" D (67.3cm H x 18.54cm W x 40.64cm D)	59 lbs. (26.8 kg)				3 lbs. 1.4 kg.		
G2 HD Red	22102.0001								
G3 HD Black	22100.0000	26.8" H x 7.4" W x 16" D (68.1cm H x 18.54cm W x 40.64cm D)							
G3 HD Red	22100.0001								

BUNN Espresso® Cool Froth® and XL S

Simple solution for exceptional espresso beverages from a sleek, compact super-automatic

Espresso



Tiger XL Cool Froth
(with milk drawer)



Tiger XL Cool Froth EXT
(external milk)



Tiger XL S

COMMON FEATURES

- Up to 180 shots per hour from less than 16" (41 cm) of counter space.
- Intelligent modular brewing chamber for consistent flavor profile.
- Simulates barista tamping and polishing motion to provide uniform extraction.
- Two-grinder model for two varieties of espresso beans.
- Each hopper holds 1.75 lbs (.8 kg) of fresh beans.
- Adjusts for 4.5 to 7.4 inch (11.4 to 18.8 cm) cup clearance.
- Pod brewing option standard.
- Intuitive operational design. Easy to use control pad guides user through steps for making drinks.
- Easy daily cleaning.

BUNN ESPRESSO TIGER COOL FROTH

- Innovative milk delivery system does not inject steam or water to dilute the foam for a full, rich flavor experience.
- Perfectly foams cold milk for great tasting iced cappuccino.
- Your choice of four drink selections: espresso, cappuccino, latte and iced cappuccino.
- Available with a self-contained 1 gallon (3.79 L) milk drawer.
- EXT (external milk) model can draw milk from two sources, expanding your beverage menu.

BUNN ESPRESSO TIGER XL S SERIES

- Intellisteam® wand shuts steam off when the milk reaches the preset temperature. No need to monitor temperature with a thermometer.

BUNN Espresso Tiger Cool Froth

Model	Product #	Size		Electrical			Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts		
Tiger XL Cool Froth	35800.0008	25.5"H x 15.8"W x 18.1"D 64.8cm H x 40.1cm W x 45.9cm D	103 lbs. (46.7 kg)	120	16	1850	Yes	
Tiger XL Cool Froth	35800.0009			208	12	2400	Yes/no plug	
Tiger XL Cool Froth EXT external milk	35800.0010	19.3"H x 15.8"W x 18.1"D 49cm H x 40.1cm W x 45.9cm D	88 lbs. (40 kg)	120	16	1850	Yes	
Tiger XL Cool Froth EXT external milk	35800.0011			208	12	2400	Yes/no plug	

BUNN Espresso Tiger XL S

Model	Product #	Size		Electrical			Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts		
Tiger XL S-2 with steam wand	35800.0006	25.5"H x 15.8"W x 18.1"D 64.8cm H x 40.1cm W x 46cm D	103 lbs. (46.7 kg)	120	16	1850	Yes	
Tiger XL S-2 with steam wand	35800.0007			208	12	2400	Yes/no plug	

Steamer, Cup Warmer and Espresso Refrigerator



Steamer



Cup Heater



Espresso Refrigerator

STEAMER FEATURES

- Intellisteam™ wand shuts steam off when the milk reaches the preset temperature.
- Consistent steam temperature for back-to-back steaming.
- Stand alone unit produces dry steam that minimizes milk dilution and will not interfere with the brewing capacity of your espresso machine.
- Stainless steel housing.
- Programmable for timed hot water dispense.
- .85 gallon (3.2 litres) boiler.

CUP HEATER FEATURES

- Stand alone unit heats cups to maintain espresso temperature when serving.
- Convection heat keeps cups warm.

ESPRESSO REFRIGERATOR

- Designed to accommodate two standard 1 gallon (3.79 litre) milk jugs.
- Works in conjunction with the BUNN Espresso® Tiger EXT models to deliver higher volume or two types of milk.
- Optional side-by-side or below-counter design.

Steamer and Cup Warmer

Model	Product #	Size		Electrical			Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts		
Steamer	35800.0401	15.4"H x 9.7"W x 17.7"D 39cm H x 24.6cm W x 45cm D	62 lbs. (28.1 kg)	120	15.8	1900	Yes	 
Cup Heater	35800.0400	15.4"H x 10"W x 15"D 39cm H x 25.4cm W x 38.1cm D	22 lbs. (10 kg)		0.5	60	Yes	
Espresso Refrigerator	35800.0403	16.7"H x 9"W x 22.3"D (42.4 cm H x 23cm W x 56.6cm D)	40 lbs. (18.1 kg)	115	1.35	Yes		

Infusion 3 Gallon Iced Tea Brewers



ITB
(TDO-4 dispenser sold separately)



ITB Dual Dilution
(TDO-N dispensers sold separately)



ITB-LP
(TDO-3.5 sold separately)

COMMON FEATURES

- Large tank provides back-to-back brewing capacity and allows 3 or 5 gallon (11.4 to 18.9 litre) tea batches.
- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- Three recipe buttons and full/half options for maximum flexibility.
- Includes single button graphic overlay for customizing the user interface.
- Digital temperature control, pre-infusion, pulse brew and cold brew lockout.
- Easy Pulse interface allows automatic programming of pulse routine.
- Brew counter keeps track of how many batches brewed.
- Includes Quickbrew (Q) funnel tip for easy conversion.

STANDARD ITB

- Brews into all BUNN iced tea dispensers (except TDS-5).

DUAL DILUTION ITB

- Meet your volume needs; brew 3 gallons (11.4 litres) of iced tea into each dispenser and serve up to 6 gallons (22.7 litres) within a narrow footprint.
- Specifically designed to accommodate and brew into two BUNN 3.5 gallon narrow tea dispensers (can also brew directly into standard tea dispensers).

LOW PROFILE BREWER

- Brews directly into TDO-3.5 gallon dispenser with brew-through lid.
- Sleek, compact, low-profile styling to accommodate a variety of spaces.

Iced Coffee Brewers									
Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
ITB (29" trunk)	41400.0000	34" H x 11.6" W x 22"D (86.4cm H x 29.5cm W x 58.4cm D)	44 lbs. (20 kg)	120	14	1700	16.3 gal/hr. 61.7 L/hr.	Yes	
ITB (with sweetner)	41400.0001								
ITB (Dual Dilution)	41400.0002								
ITB (Dual Dilution, with sweetner)	41400.0003	34" H x 12.2" W x 22.6"D (86.4cm H x 30.9cm W x 57.4cm D)							
ITB-LP	41400.0004	28.75" H x 11.57" W x 21.87"D (73cm H x 29.38cm W x 55.55cm D)	43 lbs. (19.5 kg)						

3 Gallon Iced Tea Brewers

Fresh iced tea brewing solution with simple operation for a wide variety of dispensers



TB3
(TDO-4 dispenser sold separately)



TB3Q
(TDO-4 dispenser sold separately)



TB3Q-LP
(TDO-3.5 sold separately)

TB3 AND TB3Q FEATURES

- Brews directly into any style server.
- Brews 3 gallons (11.6 litres) at a time.
- Quickbrew (Q) models available for shorter brewing cycles.
- SplashGard® funnel deflects hot liquids away from the hand.
- Dispenser sold separately (except TB3Q w/ TD4T).
- Use BUNN paper filters - Product No. 20100.0000.

 International electrical configurations

LOW PROFILE TEA BREWER FEATURES

- Brews directly into TDO-3.5 gallon dispenser with brew-through lid.
- Sleek, compact, low-profile styling to accommodate a variety of spaces.
- Quickbrew (Q) model for available shorter brewing cycle.
- SplashGard® funnel deflects hot liquids away from the hand.

TB3/TB3Q	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-4
29" trunk	TD4, TD4T, TDS-3, TDS-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

3 Gallon Iced Tea Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
TB3 29" trunk	36700 0009	34" H x 11.6" W x 22" D (86.4cm H x 29.5cm W x 58.4cm D)	43 lbs. (19.5 kg)	120	14.4	1730	16.3 gal/hr. 61.7 L/hr.	Yes	 
TB3 25.75" trunk	36700 0030	31" H x 11.6" W x 22" D (78.7cm H x 29.5cm W x 58.4cm D)	42 lbs. (19.1 kg)						
TB3 Ready Light 29" trunk	36700 0055		43 lbs. (19.5 kg)						
TB3Q Quick Brew 29" trunk	36700.0013	34" H x 11.6" W x 22" D (86.4cm H x 29.5cm W x 58.4cm D)	42 lbs. (19.1 kg)						
TB3Q w/TD4T 29" trunk	36700.0041		54 lbs. (24.5 kg)						
TB3Q Quick Brew 25.75" trunk	36700.0059	31" H x 11.6" W x 22" D (78.7cm H x 29.5cm W x 58.4cm D)	41 lbs. (18.6 kg)						
TB3Q-LP	36700.0100	28.75" H x 11.5" W x 21.87" D (73cm H x 29.4cm W x 55.6cm D)	43 lbs. (19.5 kg)						
TB3-LP	36700.0102			14.2	1700	26.7 gal/hr. 101.1 L/hr.			
				14.4	1730				
TB3 with Sweetener 29" trunk	36700.0043	34" H x 11.6" W x 22" D (86.4cm H x 29.5cm W x 58.4cm D)	44 lbs. (19.9 kg)	14.4	1730	16.3 gal/hr. 61.7 L/hr.			

Twin 3 Gallon Iced Tea Brewer



TB6
(TDO-N dispenser sold separately)

FEATURES

- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- Meet your volume needs; brew 3 gallons (11.4 litres) of iced tea into each dispenser and serve up to 6 gallons (22.7 litres) within a narrow footprint.
- Specifically designed to accommodate and brew into two BUNN Narrow Tea Dispensers (can also brew directly into standard tea dispensers).
- Includes rotating brew basket, base platform adapter, dedicated dilution nozzles and brew selection switch.
- Color coded decals help the operator properly align the brew basket, dispenser and choose the correct selection.
- Quickbrew (Q) model available for shorter brewing cycles.
- SplashGard® funnel deflects hot liquids away from the hand.
- TB6 has adjustable steep time for more control over flavor extraction.

Iced Coffee Brewers									
Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
TB6	36700.0300	34" H x 12.2" W x 22.6"D (86.4cm H x 30.9cm W x 57.4cm D)	43 lbs. (19.5 kg)	120	14.4	1730	16.3 gal/hr. 61.7 L/hr.	Yes	 
TB6Q	36700.0301						26.7 gal/hr. 101.1 L/hr.		

Infusion Series® Tea and Coffee Brewers

Space-saving combination brewer yields a variety of beverages with simple operation and precise extraction control



ITCB

(TDO dispenser, airpot and airpot booster sold separately)

ITCB	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-4
29" trunk	TD4, TD4T, TDS-3, TDS-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

PRODUCT FEATURES

- Large tank provides back-to-back brewing capacity and allows 3 or 5 gallon (11.4 to 18.9 litres) tea batches.
- Two programmable batch switches allow full and half batch brewing of iced tea.
- Brews into all BUNN iced tea dispensers (except TDS-5) and 1.9 to 3.8 litre airpots.
- BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction. Digital temperature control and cold brew lockout.
- English and Spanish.
- Brew counter for batches brewed.
- Additional iced coffee recipe included.
- Equipped with tank drain.
- Black plastic coffee funnel and separate tea funnel included.
- Stainless steel Smart Funnel® available. Product No. 32643.0000
- Compatible with BUNNlink®.
- Use BUNN paper filters - Product No. 20100.0000.



International electrical configurations

SWEETENER MODEL FEATURES

- Each brew button's sweetener may be independently set.
- Adjust sweetener volume with the Sweet Meter.
- "Out of Sweetener" indicator - LCD blinks to aid operator.
- Separate inlet for sweetener - use existing CO2 systems or external 3rd party pump for sweetener delivery.

Infusion Series Tea and Coffee Brewers

Model	Product #	Size		Electrical			Coffee Brewing Capacity	Tea Brewing Capacity	Cord Attached	Agencies	
		Dimension	Weight	Volts	Amps	Watts					
ITCB-DV (29" trunk)	35700.0000	34.04" H x 10.12" W x 23 22" D (86.5cm H x 25.7cm W x 58.98cm D)	50 lbs. (27.2 kg)	120	14	1700	4.5 gal/hr. 17 L/hr.	26.7 gal/hr. 101 L/hr.	Yes	 	
ITCB-DV (29" trunk, flip tray)	35700.0019			120/208	13	2650	7.5 gal/hr. 28.4 L/hr.				
ITCB-DV (25.75" trunk)	35700.0001			120/240	15	3500	7.5 gal/hr. 28.4 L/hr.				
ITCB-DV with Sweetener (25.75" trunk)	35700.0033	30.87" H x 10.12" W x 23 22" D (78.4cm H x 25.7cm W x 58.98cm D)		120	14	1700	4.5 gal/hr. 17 L/hr.				
ITCB-DV (25.75" trunk, flip tray)	35700.0020			120/208	13	2650	7.5 gal/hr. 28.4 L/hr.				
ITCB-DV (29" trunk, 7-hole sprayhead)	35700.0002	34.04" H x 10.12" W x 23 22" D (86.5cm H x 25.7cm W x 58.98cm D)		120/240	15	3500	7.5 gal/hr. 28.4 L/hr.				
Tall Booster	35976.0003			13.8" H x 9" W x 12.75" D (35.1cm H x 22.9cm W x 32.3cm D)	6 lbs. (2.7 kg)	120	14				1700
Short Booster	35976.0002	10.55" H x 9" W x 12.75" D (26.8cm H x 22.9cm W x 32.3cm D)		6 lbs. (2.7 kg)	120/208	13	2650				7.5 gal/hr. 28.4 L/hr.
					120/240	15	3500				7.5 gal/hr. 28.4 L/hr.

Iced Tea/Coffee Dispensers



TD4 TD4T TDS-5 ICD-3 TDO-4 TDO-5 TDO-N-3.5

4 Gallon Square Tea Dispensers						
Model	Product #	Size		Capacity	Handles	Agencies
		Dimension	Weight			
TD4 (solid lid)	03250.0003	17.1" H x 9.1" W x 15.7" D (43.4cm H x 23.1cm W x 39.9cm D)	12 lbs. (5.4 kg)	4 Gallons 15.1 Litres	Side	
TD4 (brew-through lid)	03250.0006		11 lbs. (5.0 kg)			
TD4T (solid lid, tall)	03250.0004	22" H x 9.1" W x 15.7" D (55.9cm H x 23.1cm W x 39.9cm D)	13 lbs. (5.9 kg)			
TD4T (brew-through lid, tall)	03250.0005					
TD4T (brew-through lid, tall, no decal)	03250.0018					

3, 3.5, 4 Gallon Cylinder Style Tea/Coffee Dispensers						
Model	Product #	Size		Capacity	Handles	Agencies
		Dimension	Weight			
TDS-3	33000.0000	19" H x 9.8" W x 12.8" D (48.3cm H x 24.9cm W x 32.5cm D)	9.4 lbs. (4.3kg)	3 Gallons 11.4 Litres	Side	
TDS-3.5	33000.0008	20.4" H x 9.8" W x 12.8" D (51.8cm H x 24.9cm W x 32.5cm D)	10 lbs. (4.5kg)	3.5 Gallons 13.2 Litres		
TDS-5	33000.0001	25.6" H x 9.8" W x 14.8" D (65cm H x 37.8cm W x 37.6cm D)	12 lbs. (5.4 kg)	5 Gallons 18.9 Litres		
ICD-3	33000.0002	20.6" H x 9.8" W x 14" D (52.3cm H x 37.8cm W x 35.6cm D)	10 lbs. (4.5kg)	3 Gallons 11.4 Litres		
TDO-5	34100.0001	22" H x 10.7" W x 13.7" D (55.9cm H x 27.2cm W x 34.8cm D)	12 lbs. (5.4 kg)	5 Gallons 18.9 Litres		
TDO-5 (brew-through lid)	34100.0003		14 lbs. (6.4 kg)	5 Gallons 18.9 Litres		
TDO-4	34100.0000	19" H x 10.7" W x 13.7" D (48.3cm H x 27.2cm W x 34.8cm D)	12 lbs. (5.4 kg)	4 Gallons 15 Litres		
TDO-4 (brew-through lid)	34100.0002					
TDO-3.5 (low profile)	37100.0000	9.75" H x 10.7" W x 13.7" D (24.8cm H x 27.2cm W x 34.8cm D)	8 lbs. (3.6 kg)	3.5 Gallons 13.2 Litres		
TDO-N-3.5	39600.0001	21.6" H x 6.2" W x 13.5" D (54.9cm H x 15.7cm W x 34.3cm D)	12.3 lbs. (5.6 kg)	3.5 Gallons 13.2 Litres		
TDO-N-4	39600.0002	21" H x 6.1" W x 23.6" D (53.3cm H x 15.2cm W x 60cm D)		4 Gallons 15 Litres		
LP Server Stand	37675.0001	9.3" H x 11.5" W x 14" D (23.5cm H x 29.2cm W x 35.6cm D)	8.6 lbs. (3.9 kg)	n/a	n/a	n/a

Iced Tea and Iced Coffee Brewer and Dispensers



TCD-1



TCD-2



IC3
(ICD-3 dispenser sold separately)



TU5Q
(TDO-5 dispenser sold separately)

TCD FEATURES

- Venturi valve creates siphon that pulls product through to mixing valve.
- Rear shut-off valve for cleaning dispenser.
- Accepts 1 gallon (3.8 litre) jugs in top of container or bag-in-box.
- Built-in pressure regulator provides consistent product to water ratio.
- Mixes a range of 5:1 to 15:1 concentrate to water ratio.
- For use with tea concentrate only.

IC3 FEATURES:

- Brews directly into any style portable server up to 20" tall (50.8 cm).
- Height is easily changed by adding or removing trunk extensions.
- Brew either 2 or 3 gallons (7.57 to 11.36 litres) of iced coffee at a time.
- Tailors flavor to customer preference.
- SplashGard® funnel deflects hot liquids away from the hand.

5 GALLON TEA BREWER FEATURES

- Patented iced tea brewer generates top profits through large volume sales.
- Brew either 3 or 5 gallons (11.36 to 18.93 litres) of iced tea at a time.
- Can be set up to brew concentrate only for easier transport.
- SplashGard® funnel deflects hot liquids away from the hand.

Tea Concentrate Dispensers

Model	Product #	Size		Electrical			Dispensing Capacity	Agencies
		Dimension	Weight	Volts	Amps	Watts		
TCD-1	37750.0000	22.9" H x 12.8" W x 18.1" D (58.2cm H x 32.5cm W x 46cm D)	17.1 lbs. (7.8 kg)	No electrical required			45 gal/hr. 170.3 L/hr.	NSF
TCD-2	37750.0002	22.9" H X 12.8" W X 18.9" D (58.2cm H x 32.5cm W x 48cm D)	19.6 lbs. (8.9 kg)				67 gal/hr. 253.6 L/hr.	

Iced Coffee Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
IC3	24450.0000	37.1" H x 12" W x 24" D (94.2cm H x 30.5cm W x 60.96cm D)	58 lbs. (26.3 kg)	120/208	19.5	4050	20 gal/hr. 75.7 L/hr.	No	NSF UL LISTED
Trunk Extension & Rear Panel	24427.0000		.08 lbs. (.04 kg)	Needed to accommodate the taller ICD4T dispenser.					

5 Gallon Iced Tea Brewers

Model	Product #	Size		Electrical			Brewing Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts			
TU5Q	24400.0000	38.5" H x 11.5" W x 24" D (97.8cm H x 29.6cm W x 60.96cm D)	51 lbs. (23.2 kg)	120	15	1800	28.5 gal/hr. 107.9 L/hr.	Yes	UL LISTED NSF

Liquid Coffee Refrigerated Dispenser - High Volume

High volume Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels



LCR-3 HV



BIB compartment view

LCR-3 HV FEATURES

- Refrigerated product cabinet extends product flavor profile, adjustable to maintain 41° to 65°F (5° to 18° C) in the product compartment.
- LCD screen for programming and user interface.
- Holds up to three 1-gallon (3.79 L) BIB's.
- Delivers 6 oz. (177 mL) per second of hot coffee on demand, 30-145 gallons (113-548.9 L) of coffee per hour (varies by voltage and incoming water temperature).
- 3-phase or single phase operation.
- In two flavor mode, the optional "Auto-Switching" function automatically switches from an empty BIB to a secondary BIB (left and middle pump only).
- Three buttons allow operator to dispense three independent ratios.
- Each dispense button allows the option of up to 3 portion sizes via rotary selection switch.
- 18 gallon (82L) tank capacity.
- Manual hot water faucet.

Power Volts	Phase	Heater Watts	Total Amps	Capacity Cups/Hr**	Gal/Hr
120/208	1 Phase	7820	37.6	641	25.0
120/240	1 Phase	10400	43.2	853	33.3
120/208 Y	3 Phase	12000	32.8	961	37.6
120/240 Y	3 Phase	15000	37.6	1280	49.6

**Capacity measured with a 5 oz. cup and can be increased by preheating incoming water to 140°F maximum.

Liquid Coffee Refrigerated Dispenser											
Model	Product #	Dispense Rate/Sec.	Connector Type	Size		Electrical			Capacity	Cord Attached	Agencies
		6 oz.		Dimension	Weight	Volts	Amps	Watts			
LCR-3 HV	40800.0000	25:1 - 100:1	Scholle QC	23 2" H x 15.8" W x 20.9" D (58 9cm H x 40.1cm W x 53cm D)	225 lbs. (102.1 kg)	See chart above.				No	 
	40800.0001		Scholle 1910								
	40800.0002		QCD-II								

Liquid Coffee Ambient Dispensers

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels



LCA-2, IC
(Ambient - for iced coffee)



LCA-2
(Ambient)



LCA - PC
(LCA is also available with portion control)

COMMON FEATURES (LCA-2, LCA-2 IC)

- Accommodates all ½ gallon (1.9 litre) and most 1 gallon (3.8 litre) bag-in-box (BIB) containers.
- Insulated product cabinet.
- Convenient flip tray for dispensing into decanters or carafes.
- Compatible with BUNNlink®.

LCA-2 ADDITIONAL FEATURES

- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz).
- FlavorGard® technology continuously monitors extract-to-water ratio.
- Easy-to-program one touch portion control model is available for self-serve applications.
- Equipped with tank drain.

 International electrical configurations

LCA-2 IC ADDITIONAL FEATURES

- Connects to ambient water supply for a final coffee beverage served over ice.

Liquid Coffee Ambient Dispensers																	
Model	Product #	Dispense Rate/Sec.			Connector Type	Size		Electrical			Capacity	Cord Attached	Agencies				
		1.8 oz.	2.5 oz.*	Product Ratios		Dimension	Weight	Volts	Amps	Watts							
LCA-2, IC	37700.0000	25:1 - 100:1			Scholle 1910LX	30" H x 12.2" W x 24.9" D (76.2cm H x 31cm W x 63.3cm D)	83 lbs. (37.2 kg)	120	2	240	810 cups/hr.	Yes	  				
LCA-2	34400.0001	25:1 - 100:1									LiquiBox QC/D II			208	22.6	4700	385 cups/hr.
	34400.0002	25:1 - 45:1	25:1 - 65:1	125 cups/hr.	240				25.8	6200							512 cups/hr.
	34400.0003	45:1 - 100:1	65:1 - 100:1								120			14.2	1700	125 cups/hr.	Yes
34400.0004	25:1 - 45:1	25:1 - 65:1	208	22.6	4700			385 cups/hr.	No								
All models can be changed to these electrical configurations.								LCA-2, PC		36500.0001	45:1 - 100:1	65:1 - 100:1		Scholle 1910LX	120	14.2	1700
All models can be changed to these electrical configurations.					36500.0002				25:1 - 45:1								
All models can be changed to these electrical configurations.								36500.0003		45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II		240	25.8	6200	512 cups/hr.
All models can be changed to these electrical configurations.					36500.0004				25:1 - 45:1								25:1 - 65:1
All models can be changed to these electrical configurations.								36500.0004		25:1 - 45:1	25:1 - 65:1	LiquiBox QC/D II		240	25.8	6200	

Liquid Coffee Refrigerated Dispensers

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels



LCR-2
(Refrigerated)



LCR - PC
(LCR is also available with portion control)

PRODUCT FEATURES

- Refrigerated product cabinet maintains 38 – 42° F (3 – 55° C) in product compartment.
- Accommodates all ½ gallon (1.9 litre) and most 1 gallon (3.8 litre) bag-in-box (BIB) containers.
- Convenient flip tray allows for dispensing into decanters or carafes.
- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz).
- FlavorGard® technology continuously monitors extract-to-water ratio.
- Easy-to-program one touch portion control model is available for self-serve applications.
- Equipped with tank drain.
- Compatible with BUNNlink®.



International electrical configurations

Liquid Coffee Refrigerated Dispensers												
Model	Product #	Dispense Rate/Sec.		Connector Type	Size		Electrical			Capacity	Cord Attached	Agencies
		1.8 oz.	2.5 oz.*		Dimension	Weight	Volts	Amps	Watts			
		Product Ratios										
LCR-2	34400.0036	45:1 - 100:1	65:1 - 100:1	Scholle	38" H x 12.2" W x 24.9" D (96.5cm H x 31cm W x 63.2cm D)	114 lbs. (51.7 kg)	120	14.2	1700	125 cups/hr.	Yes	 
	34400.0037	25:1 - 45:1	25:1 - 65:1									
	34400.0038	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	34400.0039	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.							120	14.2	1700	125 cups/hr.	Yes	
LCR-2, PC	36500.0036	45:1 - 100:1	65:1 - 100:1	Scholle								
	36500.0037	25:1 - 45:1	25:1 - 65:1									
	36500.0038	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	36500.0039	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.					208	25.8	4100	385 cups/hr.	No			
LCR-2, PC	36500.0036	45:1 - 100:1	65:1 - 100:1	Scholle								
	36500.0037	25:1 - 45:1	25:1 - 65:1									
	36500.0038	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	36500.0039	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.					240	25.8	6200	512 cups/hr.	No			

Liquid Coffee Low Profile Dispensers

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels



LCA-2 LP
(Ambient)



LCC-2 LP
(Chilled)

COMMON FEATURES

- Attractive appearance with shorter profile.
- Dispense over 120 (5 oz.) cups per hour.
- Accommodates two .5 gallon bag-in-box (BIB).
- Serves two coffee products and hot water.
- Refill LED lights alert the operator when more concentrate is needed.
- Rinse LED lights alert the operator cleaning is needed.
- Set up for continuous dispense (by the cup) for self-serve applications or portion-control to fill cups or carafes.

LCC-2 LP FEATURES

- Chilled product cabinet utilizes thermoelectrics for optimal performance.
- Accommodates two .5 gallon bag-in-box sized approximately 7.5”H x 5.25”W x 4”D.

Liquid Coffee Refrigerated Dispensers											
Model	Product #	Dispense Rate/Sec.	Connector Type	Size		Electrical			Capacity	Cord Attached	Agencies
		1.7 oz.		Dimension	Weight	Volts	Amps	Watts			
		Product Ratios									
LCC-2, LP	38800.0004	25:1 - 100:1	Scholle 1910LX	23 2" H x 15.8" W x 20.9" D (58.9cm H x 40.1cm W x 53cm D)	65 lbs. (29.5 kg)	120	12	1440	120 cups/hr.	Yes	 
	38800.0005		QCDII								
	38800.0006		Scholle Q/C								
	38800.0007		Rapak								
LCA-2, LP	38800.0000		Scholle 1910LX								
	38800.0001		QCDII								
	38800.0002		Scholle Q/C								
	38800.0003		Rapak								

iMIX® Dispensers with 3 Hoppers

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot drinks



iMIX-3 PC (Portion Control) **iMIX-3** **iMIX-3S** **iMIX-3S+**

COMMON FEATURES

- Three, 8-pound (3.6 kg) hoppers
- Lighted front graphics for merchandising.
- Large 4.4 gallon hot water tank.
- Cup clearance of 7.25" (18.4 cm).
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access for easy service, set up and calibration.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Left, right or top-hinged door option.
- High speed, heavy-duty whipper for complete product mixing.

International electrical configurations

iMIX-3 FEATURES

- Compatible with BUNNlink®.
- Low powder product detection system.
- Auger motors with RPM feedback monitoring assure consistent flavors and profits by controlling powder dosing.
- Digital technology adds night mode to prevent pilferage.
- English and Spanish.

iMIX-3S+ FEATURES

- Can be set as push and hold or single size portion control.
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.
- English and Spanish.



Top hinge units available



Chai Display
Product No.: 37457.0001



Hot Chocolate Display
Product No.: 37457.0002



Steamer Display
Product No.: 37457.0003

iMIX Dispensers with 3 Hoppers

Model	Product #	Size		Electrical			Display	Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts					
iMIX-3	36900.0000	32.8" H x 12.6" W x 24.1" D (83.3cm H x 32cm W x 61.2cm D)	90 lbs. (40.8 kg)	120	15	1800	Cappuccino	Black	4.5 gal/hr. (17 L/hr.)	Yes	
	36900.0001						SST				
	36900.0003						Steamer				
	36900.0004						Hot Chocolate				
	36900.0005						Specialty Tea				
iMIX-3 PC	36900.0002	35.1" H x 12.6" W x 24.1" D (top hinge unit) 35.1" H x 12.6" W x 24.1" D (89.2cm H x 32cm W x 61.2cm D)	90 lbs. (40.8 kg)	120	15	1800	Cappuccino	Black	4.5 gal/hr. (17 L/hr.)	Yes	
iMIX-3S	38600.0000										
iMIX-3S+	38600.0001										
iMIX-3	36900.0050										
iMIX-3S	38600.0051										
iMIX-3S+	38600.0050										

iMIX® Dispensers with 4 or 5 Hoppers

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot drinks



iMIX-4



iMIX-5



iMIX-5S
Silver Series



iMIX-5S+
Silver Series



Top hinge
units available

COMMON FEATURES

Includes all features below, and:

- iMIX-5: Five, 8-pound (3.6 kg) hoppers
- iMIX-4: Four, 8-pound (3.6 kg) hoppers
- Lighted front graphics for merchandising.
- 7.3 gallon (27.63 litre) hot water tank.
- Cup clearance of 7.25" (18.4 cm).
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- High speed, heavy-duty whipper.
- Front of machine access for easy service.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Compatible with BUNNlink®.
- Lighted front graphics for merchandising.
- Left, right or top-hinged door option.
- Easily removable side panels for complete access to service components.

 International electrical configurations

iMIX-5 FEATURES

- Low powder product detection system.
- Auger motors with RPM feedback monitoring assure consistent flavors and profits by controlling powder dosing.
- Digital technology adds night mode to prevent pilferage.
- English and Spanish.

iMIX-5S+ FEATURES

- Can be set as push and hold or single size portion control.
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.
- English and Spanish.

iMIX Dispensers with 4 or 5 Hoppers

Model	Product #	Size		Electrical			Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
iMIX-4	37000.0004	32.8" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)	132 lbs. (59.9 kg)	120	15	1800	Black	4.5 gal/hr. (17 L/hr)	Yes	 
iMIX-5	37000.0000	32.8" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)	135 lbs. (61.2 kg)							
iMIX-5S	38100.0000	32.8" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)								
iMIX-5S+	38100.0003									
iMIX-4	37000.0050		132 lbs. (59.9 kg)							
iMIX-5	37000.0020	(top hinge unit) 35.1" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)								
iMIX-5S	38100.0075		135 lbs. (61.2 kg)							
iMIX-5S+	38100.0050									

Fresh Mix Dispensers



FMD-5
(FMD-4 also available)



FMD-2



FMD-3



FMD-3
(Soup Display)



FMD-1

PRODUCT FEATURES

- FMD-1: One, 8-pound (3.6 kg) hopper
- FMD-2: Two, 4-pound (1.81 kg) hoppers
- FMD-3: Three, 4-pound (1.81 kg) hoppers
- FMD-4: One, 8-pound (3.6 kg) hopper; Three, 4-pound (1.81 kg) hoppers
- FMD-5: Five, 4-pound (1.81 kg) hoppers
- Variable speed hopper motors offer a wide range of product mix ratios (.75 to 6.6 grams of powder per second).
- Lighted graphics for merchandising.
- Adjustable legs and drip tray allow up to 7" (17.8 cm) opening for serving cup.
- Specially designed mixing system guarantees perfect beverages every time.
- Improved automatic rinse reduces run-on after beverage is dispensed.
- Electrical and plumbing components easily accessible through front and top.

 International electrical configurations

FMD DBC DISPENSER FEATURES

- Easy-to-program, one-touch portion control for three cup sizes.
- Fast fill – perfect for quick service restaurants.
- Each mixing chamber has independent powder to water ratio.
- System setup is password protected.
- Simple setup and hopper throw calibration system.

Fresh Mix Dispensers										
Model	Product #	Size		Electrical			Display	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
FMD-1 BLK	SET00 0196	30" H x 7.9" W x 21" D (76.2cm H x 20.1cm W x 53.3cm D)	75 lbs. (34 kg)	120	15	1800	Standard	4.2 gal./hr. 15.9 L/hr.	Yes	 
	Hot Chocolate									
FMD-2 BLK	SET00 0200		81 lbs. (36.7 kg)				Standard			
	SET00 0207						Mug Display			
FMD-3 BLK	SET00 0197		86 lbs. (39.0 kg)				Café Latte			
FMD-3 SST	SET00 0198		84 lbs. (38 kg)				Soup			
FMD-3 Soup	28600.0000		85 lbs. (38.6 kg)				Café Latte			
FMD-3 DBC BLK	29250.0000		118 lbs. (53.5 kg)				Cappuccino			
FMD-4 BLK	34900.0002	29.3" H x 18.6" W x 21.2" D (74.4cm H x 47.2cm W x 53.8cm D)	123 lbs. (55.8 kg)							
FMD-5 BLK	34900.0000									

iMIX[®] Hot and Iced Beverage Dispenser

Sleek powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot or cold drinks



iMIX-5S+ H&C
(Hot and Iced Display)



**Top hinge
unit available**

PRODUCT FEATURES

Includes all features below, and:

- 3 dispense nozzles for hot drinks and 2 for iced cappuccino with split hot/iced cappuccino lighted display.
- Capacity: five, 8-pound (3.6 kg) hoppers.
- Large, lighted front graphics for merchandising.
- One 3 gal. (11.35L) and one 2 gal (7.57L) hot water tank, with individually controlled thermostats, adjustable from 50° to 200°F, for optimum drink quality for hot and cold products.
- Cup clearance at 7.25" (18.4 cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6 cm)].
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- Key service components easily accessible through front and top.
- Easily removable side panels for complete access to service components.
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service.
- Key lock on the door prevents tampering.
- Contemporary styling for striking visual statement.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Front of machine set up and calibration.
- Can be set as push and hold or single size portion control.
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.

iMIX Hot and Iced Beverage Dispenser with 5 Hoppers

Model	Product #	Size		Electrical			Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
iMIX-5S+	40900.0000	32.8" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)	135 lbs. (61.2 kg)	120	15	1800	Black	4.5 gal/hr. (17 L/hr)	Yes	 
	40900.0050	(top hinge unit) 35.1" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)								

Cold Beverage Systems - Juice

Cold beverage dispenser with patented High Intensity mixing delivers superior drinks consistently



JDF-2S



JDF-2S PC LD
(Lighted Door
with Portion Control)

PRODUCT FEATURES

- A cost effective solution to providing customers with superior juice beverages.
- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN patented High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" cup clearance accommodates most juice containers.
- 8 lb. (3.6 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Modular dispense deck makes service fast and simple.
- Both push-button and single-size portion control in the same machine.
- Dual dispense allow simultaneous dispense from both dispense heads (juice display only).
- Three size portion control, lighted door models available.
- Preventive maintenance kit: 39690.0000.
- Lighted door units use high efficiency L.E.D. lighting system.

Cold Beverage Systems										
Model	Product #	Size		Electrical		Lighted Display	Dispense	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps					
JDF-2S	37900.0000	33.1" H x 10" W x 25.5" D (84.1cm H x 25.4cm W x 64.8cm D)	103 lbs. (46.7 kg)	120	4.5	No	push button	4 (5 oz.) drinks/ min.	Yes	 
JDF-2S (with air filter)	37900.0001									
JDF-2S (dual dispense)	37900.0025									
JDF-2S LD	37900.0008					Yes				
JDF-2S (dual dispense)	37900.0026									
JDF-2S PC LD (portion control)	37900.0016									
JDF-2S LD (dual dispense)	37900.0027									

Cold Beverage Systems - Juice

Cold beverage dispenser with patented High Intensity mixing delivers superior drinks consistently



JDF-4S



JDF-4 LD
(Lighted Door)



JDF-4 PC LD
(Lighted Door with Portion control)

PRODUCT FEATURES

- A cost effective solution to providing customers with superior juice and other concentrated beverages.
- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN patented High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" (17.8 cm) cup clearance accommodates most juice containers.
- 18 lb. (8.2 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Two modular dispense decks makes service fast and simple.
- Both push-button and single-size portion control in the same machine.
- Three size portion control, lighted door models available.
- Door lock standard.
- Cold water option available.
- Preventive maintenance kit: 39690.0000.
- Lighted door units use high efficiency L.E.D. lighting system.

Cold Beverage Systems

Model	Product #	Size		Electrical		Lighted Display	Dispense	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps					
JDF-4S	37300.0000	33.1" H x 15.7" W x 25.5" D (84.1cm H x 39.9cm W x 64.8cm D)	129 lbs. (58.5 kg)	120	6	No	push button	3 (12 oz.) drinks/ min.	Yes	 
JDF-4S (with cold water)	37300.0002									
JDF-4S LD	37300.0004									
JDF-4S LD (with cold water)	37300.0006									
JDF-4S PC LD (portion control)	37300.0023									

Cold Beverage Systems - Iced Coffee

Cold beverage dispenser with patented High Intensity mixing delivers superior drinks consistently



JDF-2S IC



JDF-2S IC LD
(Lighted Door)



JDF-4S IC



JDF-4S IC LD
(Lighted Door)

PRODUCT FEATURES

- A cost effective solution to providing customers with superior juice beverages.
- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN patented High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" cup clearance accommodates most juice containers.
- JDF-2 8 lb. (3.6 kg) and JDF-4 18 lb. (8.2 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Modular dispense deck makes service fast and simple.
- Both push-button and single-size portion control in the same machine.
- Dual dispense allow simultaneous dispense from both dispense heads (juice display only).
- Three size portion control, lighted door models available.
- Preventive maintenance kit: 39690.0000.
- Lighted door units use high efficiency L.E.D. lighting system.

Cold Beverage Systems										
Model	Product #	Size		Electrical		Lighted Display	Dispense	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps					
JDF-2S (Iced Coffee)	37900.0002	33.1" H x 10" W x 25.5" D (84.1cm H x 25.4cm W x 64.8cm D)	103 lbs. (46.7 kg)	120	4.5	No	push button	4 (5 oz.) drinks/min.	Yes	 
JDF-2S LD (Iced Coffee)	37900.0009					Yes				
JDF-4S (Iced Coffee)	37300.0013	33.1" H x 15.7" W x 25.5" D (84.1cm H x 39.9cm W x 64.8cm D)	129 lbs. (58.5 kg)	120	6	No	push button	3 (12 oz.) drinks/min.	Yes	 
JDF-4S (Iced Coffee) (with cold water)	37300.0016					Yes				
JDF-4S LD (Iced Coffee)	37300.0020					Yes				

iMIX[®] Dispensers - Iced Coffee

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional cold drinks



iMIX-3 IC
(Iced Coffee Display)



iMIX-3S+ IC
(Iced Coffee Display)



iMIX-5 IC
(Iced Coffee Display)



iMIX-5S+ IC
(Iced Coffee Display)

COMMON FEATURES

- Three, 8-pound (3.6 kg) hoppers
- Lighted front graphics for merchandising.
- Large 4.4 gallon hot water tank.
- Cup clearance of 7.25" (18.4 cm).
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access for easy service, set up and calibration.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Left or right-hinged door option.
- Key service components easily accessible through front, top and side.
- High speed, heavy-duty whipper for complete product mixing.



International electrical configurations

iMIX-3 AND iMIX-5 FEATURES

- Compatible with BUNNlink[®].
- Low powder product detection system.
- Auger motors with RPM feedback monitoring assure consistent flavors and profits by controlling powder dosing.
- Digital technology adds night mode to prevent pilferage.
- English and Spanish.

iMIX-3S+ AND iMIX-5S+ FEATURES

- Can be set as push and hold or single size portion control.
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.
- English and Spanish.



Iced Cappuccino Display
Product No.: 37457.0006

iMIX Dispensers with 3 Hoppers

Model	Product #	Size		Electrical			Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
iMIX-3 IC	36900.0026	32.8" H x 12.6" W x 24.1" D (83.3cm H x 32cm W x 61.2cm D)	90 lbs. (40.8 kg)	120	15	1800	Black	4.5 gal/hr. (17 L/hr.)	Yes	
iMIX-3S+ IC	38600.0006									
iMIX-5 IC	37000.0002	32.8" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)	135 lbs. (61.2 kg)							
iMIX-5S+ IC	38100.0010									

Ultra[®] Gourmet Ice[®] Systems

Frozen beverage dispenser with patented reversing auger technology for superior mixing and freeze



Ultra-2
(All Black)



Ultra-2
(White/Stainless)



AFPO-2 SL
Autofill System
(Total pumping and metering system for liquid product)

COMMON FEATURES

- Patented reversing auger design quickens freeze time and reduces air mixing with product.
- Very simple to program and run with touchpad display, which also guides cleaning and preventive maintenance.
- Internally monitored refrigeration system.
- Liquid autofill models available. Please contact your BUNN sales representative.
- Compatible with BUNNlink[®].

 International electrical configurations

ULTRA-2 FEATURES

- Full 2-year parts and 1-year labor warranty. 5-year parts and 1 year labor warranty on compressor and 3-year parts and labor warranty on electronics. See the product manual for additional details.

ULTRA-2 HP FEATURES

Enhanced-performance frozen beverage dispenser shortens freeze down times

- High Performance versus standard model comparison:
Ambient Room Temp. Ultra-2 HP is:
70¼F 17% Faster freeze down time
80¼F 21% Faster freeze down time
90¼F 32% Faster freeze down time
Note: The higher the ambient temperature, the greater the improvement over the standard model.

Ultra Gourmet Ice Systems with 2 Hoppers

Model	Product #	Size		Electrical			Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
ULTRA-2	34000.0000	31.9" H x 16" W x 24.5" D (81cm H x 40.6cm W x 62.2cm D)	137 lbs. (62.0 kg)	120	12	1440	Stainless/White	2 Hoppers @ 3.0 gal. each	Yes	NSF ETL
	34000.0001						Stainless/Black			
	34000.0008						All Black			
	34000.0012						Stainless/White			
	34000.0063						(painted frame, Spanish)			
ULTRA-2 (flat lid)	34000.0013	29.9" H x 16" W x 24.5" D (75.96cm H x 40.6cm W x 62.2cm D)	137 lbs. (62.0 kg)	120	12	1440	Black	2 Hoppers @ 3.0 gal. each	Yes	NSF ETL
ULTRA-2 HP	34000.0079	31.9" H x 16" W x 24.5" D (81cm H x 40.6cm W x 62.2cm D)					Stainless/White			
	34000.0081						Stainless/Black			
	34000.0080						All Black			
ULTRA-2 with Autofill Hoppers	34000.0067	31.9" H x 16" W x 24.5" D (81cm H x 40.6cm W x 62.2cm D)					137 lbs. (62.0 kg)			
	34000.0068		All Black							
	34000.0069		Stainless/Black							
	34000.0073		(painted frame, Spanish)							
AFPO-2, SL	28400.0004	7.8" H x 17.5" W x 12.7" D (19.8cm H x 44.5cm W x 32.3cm D)	35 lbs. (15.9 kg)	4	480	480	Black	5 lbs. dry product		ETL
AFPO-2	28400.0007									ETL

Ultra[®] Gourmet Ice[®] Systems

Frozen beverage dispenser with patented reversing auger technology for superior mixing and freeze



Ultra-2 PAF



Ultra-1

COMMON FEATURES

- Patented reversing auger design quickens freeze time and reduces air mixing with product.
- Very simple to program and run with touchpad display, which also guides cleaning and preventive maintenance.
- Internally monitored refrigeration system.
- Liquid autofill models available. Please contact your BUNN sales representative.
- Compatible with BUNNlink[®].

 International electrical configurations

ULTRA-1 FEATURES

- Full 2-year parts and 1-year labor warranty. 5-year parts and 1 year labor warranty on compressor and 3-year parts and labor warranty on electronics. See the product manual for additional details.

ULTRA-2 PAF FEATURES

- Powdered autofill product hoppers refill product at a rate of 1.1 fluid oz./sec.
- Full 3-year parts and labor warranty on electronics and 5-year parts warranty on compressor. See the product manual for additional details.
- High efficiency L.E.D. lighting system.

Ultra Gourmet Ice Systems

Model	Product #	Size		Electrical			Finish	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
ULTRA-1	39800.0000	31.9" H x 7.9" W x 24.2" D (81cm H x 20.1cm W x 61.5cm D)	76.4 lbs. (34.7 kg)	120	7.5	900	SST/White	1 Hoppers @ 3.0 gal. each	Yes	 
	SST/Black									
	Black									
ULTRA-2 PAF	34000.0500	42" H x 16" W x 25" D (106.7cm H x 40.6cm W x 63.5cm D)	177.6 lbs. (80.6 kg)	120	12	1440	SST/White	5 lbs. dry product	Yes	 
	34000.0504 (no logo)									
	34000.0501									

Precise Temperature Water Dispensers



PRODUCT FEATURES

- Pourover model tank size: 80 oz. (2.37 litres)
- Precise temperature 72°-212°F (22.2°C-100°C) ensures consistent results. (OHW models)
- High quality, easy-to-clean stainless steel exterior and tank for a long life.
- Includes drip tray. (HW2 and OHW models)
- Includes dry-plug prevention for easy installation. (H10X models)
- Pourover model plugs into any 120 volt outlet, no plumbing needed.
- H5 models can be front or side wall mounted.
- Drip tray available for H5 models. Product No. 02497.0000

 International electrical configurations (HW2, H5 and HW10 models)

Precise Temperature Water Dispensers

Pourover & Medium Volume Machines

Model	Product #	Size		Electrical			°F Settings	Capacity	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts				
OHW	02550.0003	16.9" H x 6.5" W x 10.8"D (42.9cm H x 16.8cm W x 27.4cm D)	13 lbs. (5.9 kg)	120	8.6	1040	200	80 oz. 2.37 L	Yes	 
HW2	02500.0001	24" H x 7.1" W x 14.3"D (60.96cm H x 18.03cm W x 36.3cm D)	23 lbs. (10.43 kg)		15	1800		4.2 gal/hr. 15.9 L/hr.		
HW2 Black	02500.0005									

Large Volume Machines

Model	Product #	Size		Electrical			°F Settings	cold water input 35°	hot water input 140°	Cord Attached	Agencies
		Dimension	Weight	Volts	Amps	Watts					
H5E-18-120	12500.0020	28.5" H x 7.1" W x 17.5" D (72.4cm H x 18.03cm W x 44.5cm D)	32 lbs. (14.1 kg)	120	15.4	1850	85/115	varies with application		No	 
	12500.0033						72				
H5E-40-240	12500.0024				240	16.9	4050				
H5E-40-208	12500.0025			208	19.5						
H5E-DV PC	39100.0000			120	15.4	1850	200	3.7 gal/hr. 14 L/hr.	8.1 gal/hr. 31 L/hr.		
	39100.0001			240	16.9	4050		7.3 gal/hr. 27.6 L/hr.	14.7 gal/hr. 55.6 L/hr.		
H5X-DV PC	39100.0005			120	15.4	1800	90	3.7 gal/hr. 14 L/hr.	n/a		
H5X-40-240	12500.0026			240	16.9	4050	212	7.3 gal/hr. 27.6 L/hr.	14.7 gal/hr. 55.6 L/hr.		
H5X-40-208	12500.0027			32 lbs. (14.1 kg)	208	19.5		3.7 gal/hr. 14 L/hr.	8.1 gal/hr. 31 L/hr.		
H5X-18-120	12500.0028				120	15.4	1850	212	3.7 gal/hr. 14 L/hr.		
H5X-60-208	12500.0032		33 lbs. (15.0 kg)	208	29	6050		9.9 gal/hr. 37.5 L/hr.	18.6 gal/hr. 70.4 L/hr.		
H5M-18-120	12500.0046		44 lbs. (20.0 kg)	120	15.4	1850	200	3.7 gal/hr. 14 L/hr.	8.1 gal/hr. 31 L/hr.		
H10X-80-208	26300.0001	34.4" H x 10.2" W x 24.5"D (87.4cm H x 25.9cm W x 62.2cm D)	66.7 lbs. (30.3 kg)	208	38.7	8050	212	13.2 gal/hr. 50 L/hr.	24.8 gal/hr. 93.9 L/hr.		
H10X-80-240	26300.0000			240	33.5						

Water Quality Filter Systems



EQHP-10



EQHP-25



EQHP-54



EQHP-ESP

BUNN® water quality filtration systems, when used with BUNN brewing equipment, ensure that your customers are getting the best tasting beverage possible. The Easy Clear® filters are manufactured to BUNN specifications and address water problems such as taste and odor; sediment, limescale and hardness.

Choose the right water quality system for your BUNN brewing equipment and enhance the flavor of your beverages.

Quality, profit and consistency; what matters to you, matters to BUNN.



EQHP-SFTN



EQHP-TEA



EQHP-Twin 70L



EQHP-Twin 108SP




Scale-Pro®

New System

New EQHP Model #	New EQHP Part #	New Configuration Capacity @ Flow Rate	Replacement Cartridges
EQHP10L	39000.0001	10000 gal @ 1.5 gpm	39000.1001
EQHP10	39000.0004	10000 gal @ 1.5 gpm	39000.1004
EQHP25L	39000.0002	25,000 gal @ 2.1 gpm	39000.1002
EQHP25	39000.0005	25,000 gal @ 2.1 gpm	39000.1005
EQHP35L	39000.0011	35,000 gal @ 3.34 gpm	39000.1011
EQHP54L	39000.0003	54,000 gal @ 5 gpm	39000.1003
EQHP54	39000.0006	54,000 gal @ 5 gpm	39000.1006
EQHP-TWIN 70L*	39000.0012	70,000 gal @ 6.68 gpm	(2) 39000.1011
EQHP-TWIN 108SP**	39000.0013	108,000 gal @ 10 gpm	(2) 39000.1006 (1) 39000.1010
Scale-Pro	39000.0010	Recommended 6 month change-out	39000.1010
EQHP-ESP	39000.0008	422 gal @ 10.5 gpg @ .5gpm	39000.1008
EQHP-SFTN	39000.0009	1350 grains	39000.1009
EQHP-TEA	39000.0007	4350 grains	39000.1007

*Requires two (2) cartridges
**Requires three (3) cartridges

Coffee Decanters and Warmers

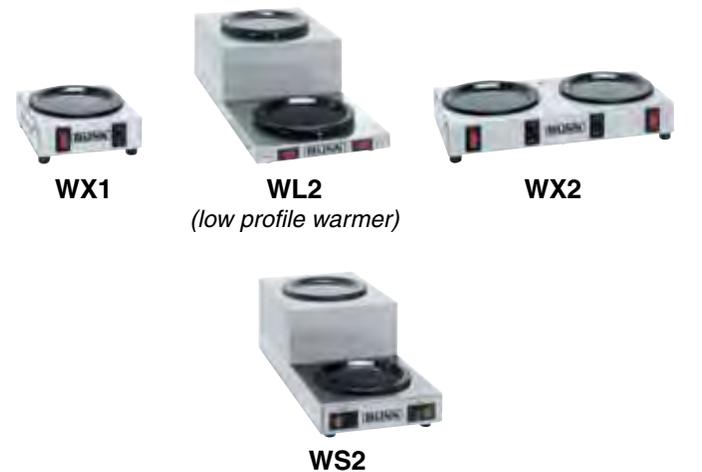

EASY POUR PRODUCT FEATURES

- Container and handle are a one piece molded design for extra strength and durability.
- Clear, high-impact-resistant material complies with FDA regulations for food contact.
- Base is high quality stainless steel.
- Drip-proof, fast-pour lip
- Easy Pour® decanters can be private labeled. Please contact your BUNN sales representative for more information.

WARMER FEATURES

- Warmers are an ideal way to merchandise the aroma and appearance of your fresh-brewed coffee in decanters at remote serving stations.
- Complete line of single, side-by-side and step-up warmers to fit your serving needs.
- Each warmer has a separate “on/off” switch and maintains coffee at optimum serving temperature.

 International electrical configurations

Coffee Decanters							
Model	Product #	Number in Case	Handle	Shipping Weight	Agency		
Easy Pour 64 oz.	06100.0101	1	Black	1.0 lb. (0.5 kg)	n/a		
	06101.0101		Orange				
Glass 64 oz.	06078.0001		Black				
	06088.0001		Orange				
Stainless 64 oz.	06026.0000		Black	1.5 lbs. (0.7 kg)			
	06041.0000		Orange				
NCD 64 oz.	34116.0001	Black	1.0 lb. (0.5 kg)				

Coffee Decanter Warmers							
Model	Product #	Dimension	Finish	Number of Warmers	Shipping Weight	Brewer	Agency
WS2	12882.0004	6" H x 7.5" W x 17.8" D (15.24cm H x 19.05cm W x 45.21cm D)	Stainless	Two	7 lbs. (3.2 kg)	For use with S, ST & STF brewers	
	12882.0006		Black				
WL2	11402.0001	5.2" H x 8" W x 18" D (13.21cm H x 20.32cm W x 45.72cm D)	Stainless			For use with C, CW & VP17, etc. brewers	
	11402.0004		Black				
11402.0006							
WX1	06450.0004	6.5" W x 2.53" H x 7" D (16.51cm W x 6.4cm H x 17.8cm D)	Stainless	One	3 lbs. (1.4 kg)	For use with S, ST & STF brewers	
WX2	06310.0004	14" W x 2.53" H x 7" D (35.6cm W x 6.4cm H x 17.8cm D)		Two	4 lbs. (1.8 kg)	For use with S, ST & STF brewers	

Paper Filters



Selection of coffee filters is a vital step in brewing perfect coffee - don't settle for anything less than BUNN quality coffee filters. Using the results of years of research, BUNN manufactures the best filters from high quality, heavy weight paper, so the water flows properly through the coffee. BUNN filters are uniquely designed for strength so the sides are taller, and you don't end up with overflow and grounds in your coffee.

BUNN's paper stock used in the manufacturing of our coffee filters is produced using an elemental chlorine-free (ECF) bleaching method. This process insures that there will be no detectable level of dioxin in BUNN's paper coffee filters. Our paper stock supplier conducts regular testing, as required by the Environmental Protection Agency (EPA), to confirm that no detectable dioxin is present.

If you want to improve your profits through a better coffee program, don't overlook the long term value of using the right BUNN coffee filter in your BUNN brewer.

Paper Filters

Filter Type	Product Number	Description	Number per Bag	Bags per Case	Number Cluster	Overall Measure x Base Diameter (inches)	Packed per Case	Case Weight (lbs/kg)	Cases per Skid/Tier
Decanter Filters	20115.0000	Regular C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	9 3/4 x 4 1/4	1000	4.2/1.91	180/15
	20116.0000	Regular Narrow C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	9 1/2 x 3 1/4	1000	4.2/1.91	180/15
	20122.0000	Regular Fast Flow C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	9 3/4 x 4 1/4	1000	4.5/2.04	180/15
	20106.0000	A10/Retail - 8 & 10 cup brewers	500	2	50	8 1/2 x 3	1000	3.4/1.54	231/21
Urn Filters	20109.0000	Urn - U3, SRU, IC-3	252	1	36	17 3/4 x 7 1/4	252	5.5/2.49	88/11
	20112.0000	Narrow Base Urn	250	1	25	18 1/2 x 6 1/4	250	5.5/2.49	88/11
	20124.0000	Urn, 3 gallon	252	1	36	19 x 7 1/4	252	6.1/2.77	88/11
	20111.0000	Urn, 6 gallon	252	1	36	20 x 7 3/4	252	6.6/2.99	84/12
	20125.0000	Urn, 6 gallon	250	1	25	21 x 8 3/4	250	7.5/3.4	72/9
	20113.0000	Urn, 10 gallon	250	1	25	23 3/4 x 8 3/4	250	9.3/4.22	54/9
	20131.0000	Urn, 10 gallon	252	1	36	24 1/4 x 10 3/4	252	9.7/4.40	36/6
Other Filters	20120.0000	System III	252	2	36	15 1/8 x 5 3/8	504	8.5/3.86	108/12
	20100.0000	Tea - Tea Brewers, Single & Dual Coffee brewers, 1 1/2 gallon urns, ITCB, system II	500	1	50	12 3/4 x 5 1/4	500	4.7/2.13	150/15
	20157.0000	Gourmet C Funnel		2		12 1/2 x 4 3/4	1000		
	20138.0000	Gourmet - Iced Tea, Dual, Dual SH, Dual TF, 1 1/2 gallon urns	252	2	36	13 3/4 x 5 1/4	504	5.5/2.49	108/12

Universal Airpot Racks and Coffee-iser



Coffee-iser with UNIV-6 APR



UNIV-2 APR (2 lower)



UNIV-2 APR



UNIV-3 APR

AIRPOT RACK FEATURES

- Holds push-button or lever-action airpots.
- Displays can be combined or taken apart easily for greater flexibility.
- Sturdy, carbon-steel wire construction with vinyl coating resists corrosion, easy to clean.
- Sponge-lined trays to catch drips and spills.

* Please refer to specification sheets found online at www.bunn.com for detailed drawings.

COFFEE-ISER FEATURES

- Sturdy, rotationally molded black plastic base.
- Vinyl coated to resist corrosion and extend life.
- Holds 2.2 liter to 3.0 liter airpots.
- Sponge-lined trays to catch drips and spills.
- Full color graphics and light kit for maximum merchandising.
- Available in a variety of single item pieces or combination sets.

Universal Airpot Racks

Model	Product #	Size		Capacity	Agency
		Dimension	Weight		
UNIV-2 APR	35728.0000 (1 upper, 1 lower)	14.1" H x 7.5" W x 24.1" D (35.8cm H x 19.1cm W x 61.2cm D)	5 lbs. (2.3 kg)	2 airpots	n/a
	35728.0001 (2 lower)	6.9" H x 14.9" W x 11.2" D (17.5cm H x 37.9cm W x 28.5cm D)	4.5 lbs. (2 kg)		
UNIV-3 APR	35728.0002 (3 lower)	6.9" H x 22.9" W x 11.2" D (17.5cm H x 58.2cm W x 28.5cm D)	6 lbs. (2.7 kg)	3 airpots	
UNIV-4 APR	35728.0003 (2 upper, 2 lower)	14.0" H x 14.9" W x 24.9" D (35.6cm H x 37.9cm W x 63.3cm D)	10 lbs. (4.5 kg)	4 airpots	
UNIV-5 APR	35728.0004 (3 upper, 2 lower)	14.0" H x 22.9" W x 24.9" D (35.6cm H x 58.2cm W x 63.3cm D)	13 lbs. (5.9 kg)	5 airpots	
UNIV-6 APR	35728.0005 (3 upper, 3 lower)	14.0" H x 22.9" W x 24.9" D (35.6cm H x 58.2cm W x 63.3cm D)	15 lbs. (6.8 kg)	6 airpots	

Coffee-iser


Model	Product #	Size		Capacity	Agency
		Dimension	Weight		
Advantage Coffee-iser	SET00.0076	53" H x 22" W x 23" D (134.6cm H x 55.9cm W x 58.4cm D)	23 lbs. (10.4 kg)	6 airpots	n/a
Advantage Decanter Coffee-iser	SET00.0077	n/a	10 lbs. (4.5 kg)	n/a	
Base-X	27908.0000	10.3" W x 22" H x 23" D (26.2cm W x 55.9cm H x 58.4cm D)	3.4 lbs. (1.5 kg)	6 airpots	
Standard Background	27909.0000	n/a	7 lbs. (3.2 kg)	n/a	
Light Kit	27940.0000		1 lb. (.5 kg)		
Standard ID Tags	27912.0000		2 lbs. (1 kg)		
Wire Stand (for decanters)	28189.0000				

BUNNserve®

When you choose BUNNserve for your beverage equipment, you can be assured of service so you can serve the wonderful beverages your customers demand.

Choose between two service options:

Phone support – Standard operational support to operate equipment properly. Free with purchase of the equipment.

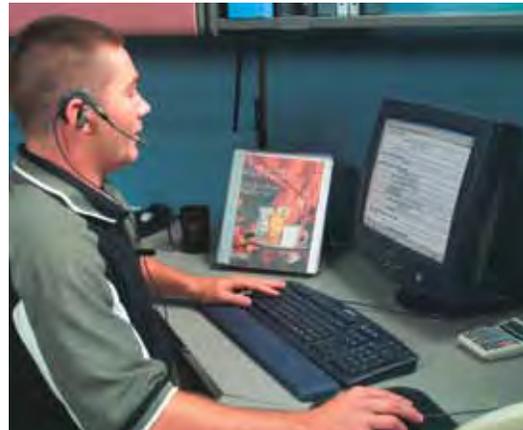

BUNNserve– Along with phone support, a full suite of onsite support services is available nationally. Your account is monitored so specific service needs are promptly met.

Service offerings include:

- Deployment and installation services
- Service dispatch available 24x7x365
- Preventive maintenance and calibration programs
- Single point of contact
- Service history reporting
- Asset reporting
- Web access to service order status



BUNNserve services are available with flexible pricing options			
Services	Flat Rates	Standard Time & Material	National Rate Time & Material
Installations	✓	✓	✓
Removals	✓	✓	✓
Calibrations	✓	✓	✓
Preventive Maintenance	✓	✓	✓
Service Dispatch		✓	✓
Nationwide Equipment Rollouts	*	✓	✓
Flat Rates	One flat rate fee includes labor, travel, parts and management fee.		
Standard Time & Material	Labor and travel are invoiced at variable, regional rates for actual hours worked, plus parts and a management fee.		
National Rate Time & Material	Labor and travel are invoiced at national hourly rates for actual hours worked, plus parts and a management fee.		
*	Customized pricing available based on requirements.		



Easily Analyze Beverage Profits with Interactive Calculators from BUNN

Are you interested in experimenting with different beverage serving scenarios and would you like to quickly analyze current beverage profitability? Take advantage of a line of easy-to-use, interactive Profit Calculators from BUNN. These free software tools allow a user to input a variety of parameters to instantaneously calculate profit profiles for several different beverage categories. The data can be manipulated for individual serving centers or whole properties and franchises.

Sample parameters include:

- Number of locations
- Case cost per pound (kilogram)
- Servings per case
- Ounces (grams) or fluid ounces (milliliters) of product used per serving
- Fluid ounces (milliliters) per serving
- Servings sold per day
- Price per serving
- Added costs per serving
- Days location is open per year

Calculators available:

- Coffee -- Roast, Liquid, and Single Serve
- Iced Tea
- Frozen Beverage
- Hot or Cold Beverage from Powder
- Cold Beverage (Juice and Iced Coffee)
- Espresso



You can also factor in any upcharge and estimate the time it will take to pay for an investment in quality beverage equipment.

BUNN Profit Calculators are available FREE through your BUNN sales representative or can be requested on our website at www.bunn.com.

Thank you for your interest
in BUNN products.



Our continuing focus on preserving
the earth for future generations.

BUNN[®]

Bunn-O-Matic Corporation

1400 Stevenson Drive • Springfield, IL 62703, USA • Phone: (800) 637-8606 or
+1 (217) 529-6601 • U.S. Fax: (800) 542-4967 • International Fax: +1 (217) 529-2827
www.bunn.com